

# BROCADE 48000 DIRECTOR



## STORAGE AREA NETWORK

## A Powerful Director for Enterprise SAN Solutions

### HIGHLIGHTS

- Delivers industry-leading 4 and 8 Gbit/sec Fibre Channel and FICON connectivity for high-performance SANs; supports 10 Gbit/sec inter-chassis (ISL) connections
- Offers Adaptive Networking Services, Fibre Channel routing, hardware-assisted traffic forwarding for FCIP with QoS, and iSCSI connectivity
- Supports FICON, FICON cascading, FICON extension, and FICON CUP for IBM System z environments; supports intermix of FCP and FICON on a port-by-port basis
- Protects existing investments in Brocade Fabric OS and M-EOS\*-based environments through native E\_Port switch interoperability
- Provides up to 384 ports in a single domain and a 14U enclosure with up to 1152 ports in a single rack, enabling SAN fabrics with thousands of ports
- Meets ultra-high-availability requirements with redundant, hot-pluggable components, no single points of failure, and non-disruptive software upgrades
- Improves efficiency for significant operational savings on power, cooling, and data center resources

The Brocade® 48000 Director delivers industry-leading 4, 8, and 10 Gbit/sec Fibre Channel performance, high availability, multiprotocol connectivity, and broad investment protection for enterprise SANs. It scales non-disruptively from 32 to as many as 384 concurrently active 4 or 8 Gbit/sec full-duplex ports in a single domain. In addition, it supports blades for Fibre Channel Routing, FCIP, iSCSI, and fabric-based applications. The Brocade 48000 also provides industry-leading power and cooling efficiency, helping to reduce the total cost of ownership.

With its intelligent fifth-generation ASIC, the Brocade 48000 is a reliable foundation for core-to-edge SANs (including native operation with Brocade M-EOS fabrics), enabling fabrics capable of supporting thousands of hosts and storage devices (see Figure 1). Whether used as a core building block for an enterprise fabric or as a standalone director, the Brocade 48000 is designed to be a reliable, high-availability solution.


The Brocade 48000 can integrate with heterogeneous environments, including IBM mainframes and open systems platforms with multiple operating systems such as Microsoft Windows, Linux, Solaris, HP-UX, AIX, and i5/OS. These capabilities help make it ideal for enterprise management and high-volume transaction processing applications such as ERP and data warehousing, as well as data backup, remote mirroring, and high-availability clustering.



\* Brocade M-EOS fabrics are McDATA switches and directors running McDATA Enterprise OS

# BROCADE

**Figure 1.** A Brocade 48000 Director surrounded by Brocade edge directors and switches enables cost-effective, highly scalable enterprise SANs.

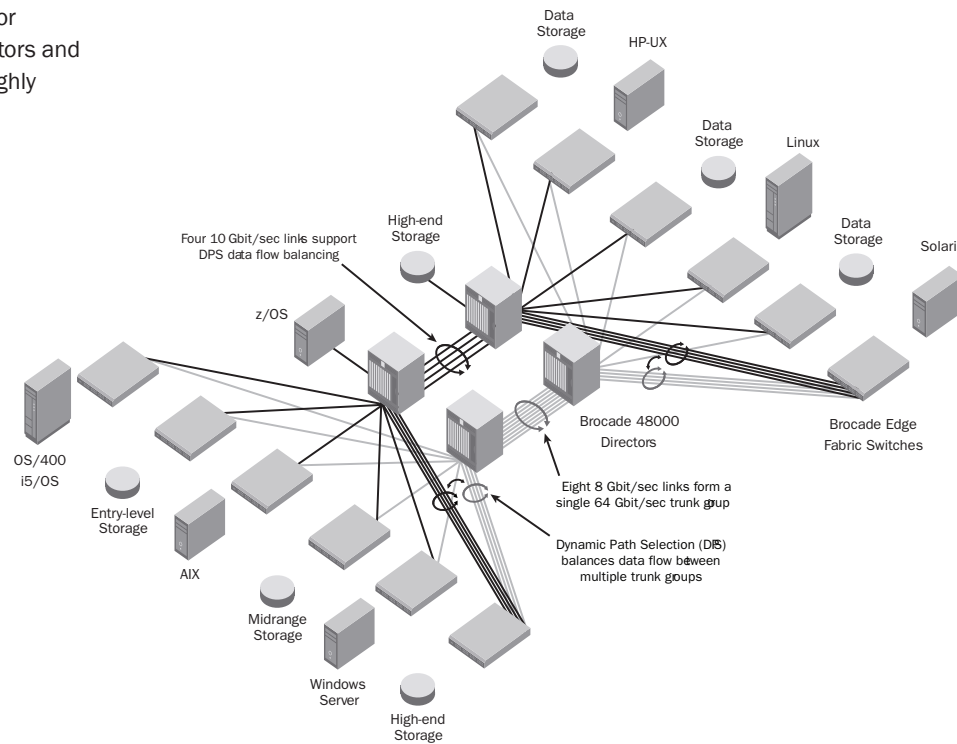

## ULTRA-HIGH AVAILABILITY THROUGHOUT THE FABRIC

The core-to-edge SAN model features redundancy within the director as well as a high-availability network approach for the entire fabric. The ultra-high-availability features of Brocade Fabric OS® help deliver continuous overall system availability with:

- Non-disruptive software upgrades and hot code activation
- Dual-redundant control processors with stateful failover
- Redundant, hot-swappable components and redundant power and cooling subsystems

## INDUSTRY-LEADING PERFORMANCE

The Brocade 48000 delivers industry-leading performance while using the least data center resources of any SAN director, resulting in significant electricity savings and cooling efficiency. It is ideal for large SANs that require the highest levels of performance, with each blade slot delivering 64 Gbit/sec of bandwidth to front-facing ports. Moreover, local switching enables neighboring director ports to communicate without having to use valuable backplane bandwidth—resulting in lower switching latency and full-speed 8 Gbit/sec port density.

To provide even higher performance, enhanced Brocade ISL Trunking combines up to eight 8 Gbit/sec ports between switches into a single, logical high-speed trunk running at up to 64 Gbit/sec. In addition, exchange-based Dynamic Path Selection (DPS) optimizes fabric-wide performance and load balancing by automatically routing data to the most efficient available path in the fabric.

To enhance business continuity across metro distances, the Brocade 48000 can utilize 8 Gbit/sec blades or 10 Gbit/sec blades (using dark fiber or DWDM) between sites. In this scenario, exchange-based DPS provides automatic load balancing and routing to optimize performance.



**Figure 2.** 8 Gbit/sec blades for the Brocade 48000 Director are available in 16-, 32-, and 48-port configurations.

## ADAPTIVE NETWORKING SERVICES

The Brocade 48000 provides an expandable platform for intelligent, policy driven services that help organizations move and protect their data in virtualized environments. These services are part of the Brocade Adaptive Networking Services strategy, which includes Quality of Service (QoS) and traffic isolation.

## INTELLIGENT FABRIC APPLICATIONS

The Brocade 48000 supports the Brocade FA4-18 blade for a variety of fabric-based applications—increasing flexibility, improving operational efficiency, and simplifying SAN management. This includes Brocade OEM and ISV Partner applications for storage virtualization/volume management, replication, and data mobility, as well as Brocade Data Migration Manager (DMM).

## INTELLIGENT SAN MANAGEMENT AND MONITORING

To centralize SAN management for greater efficiency, the Brocade 48000 leverages Fabric OS, the embedded operating system that provides native interoperability with Brocade M-EOS fabrics. Organizations can simplify fabric management by leveraging Brocade Fabric Manager, Enterprise Fabric Connectivity Manager (EFCM), and the integrated Brocade Web Tools element

manager. A command line interface is also available, as well as the optional Brocade Advanced Performance Monitoring module, which helps improve resource optimization and productivity. Moreover, Brocade utilities integrate with popular third-party storage management applications.

FICON AND MIXED ENVIRONMENT SUPPORT

The Brocade 48000 supports the FICON protocol for IBM mainframe environments with 4 and 8 Gbit/sec blades—enabling FICON and Fibre Channel traffic on a port-by-port basis in intermix mode. In addition, the Brocade FICON implementation supports cascaded FICON technologies; 1, 2, 4, and 8 Gbit/sec FICON speeds; the Brocade FR4-18i SAN Extension blade cascading over IP connections; and CUP in-band management.

With N\_Port ID Virtualization (NPIV) technology, the Brocade 48000 also enables the sharing of a single FCP port connected to a z/OS FCP channel across multiple operating system images.

PERFORMANCE-OPTIMIZED SAN EXTENSION

The Brocade 48000 can utilize the Brocade FR4-18i SAN Extension blade to interconnect SAN islands for long-distance extension—without the risk and complexity of physical merging. Bandwidth-maximizing features for Fibre Channel-over-IP (FCIP) include:

- Hardware-based compression, IPsec encryption, eight virtual FCIP tunnels per port, traffic-shaping, and WAN QoS capabilities

- Extensive port buffering and line-rate Gigabit Ethernet performance with support for jumbo packets

The Brocade 48000 also supports the Brocade FC4-16IP iSCSI blade so low-cost servers can access high-performance Fibre Channel storage resources.

MAXIMIZING SAN INVESTMENTS

Brocade and its partners offer complete SAN solutions to meet a wide range of technology and business requirements. These solutions include education and training, support, and services to help optimize SAN investments. For more information, contact an authorized Brocade sales partner or visit [www.brocade.com](http://www.brocade.com).

BROCADE 48000 DIRECTOR SPECIFICATIONS

Systems Architecture			
System blades	Up to 384 4 or 8 Gbit/sec Fibre Channel ports; up to eight Fibre Channel blades (16, 32, or 48 ports per blade); up to 1152 ports per 42U rack	System bandwidth	1024 Gbit/sec backplane switching capacity 3.264 Tbit/sec (4 Gbit/sec blades, local switching) 6.528 Tbit/sec (8 Gbit/sec blades, local switching)
	Up to eight Brocade FC10-6 blades (six 10 Gbit/sec Fibre Channel ports per blade)	Switch latency	<2.1 $\mu$ sec any port to any port at 2 Gbit/sec, cut-through routing; <3.6 $\mu$ sec any port to any port at 4 Gbit/sec, cut-through routing; <7.4 $\mu$ sec any port to any port at 10 Gbit/sec, cut-through routing
	Up to four Brocade FR4-18i SAN Extension blades (16 4 Gbit/sec Fibre Channel ports and two Gigabit Ethernet ports per blade)	Maximum frame size	2112-byte payload
	Up to four Brocade FC4-16IP iSCSI blades (eight 4 Gbit/sec Fibre Channel ports and eight Gigabit Ethernet ports per blade)	Frame buffers	1000 for FC4-16, FR4-18i, FC4-16IP; 2000 for FC4-32, FC4-48; dynamically allocated up to 255 per port; 2000 for FC8-16, FC8-32, and FC8-48 with up to 1500 per port; 720 for FC10-6
	Up to two Brocade FA4-18 Application Blades (16 4 Gbit/sec Fibre Channel ports and two Gigabit Ethernet ports per blade)	Classes of service	Class 2, Class 3, Class F (inter-switch frames)
Control processor	Redundant (active/standby) control processor modules	Port types	FL_Port (all except on FC4-48 and FC10-6 blades), F_Port (including NPIV support), E_Port, self-discovery based on switch type (U_Port); port type control for EX_Port, VE_Port and Vex_Port; Gigabit Ethernet for VE_Port and Vex_Port; FC10-6 supports E_Port only
Scalability	Full fabric architecture of 239 switches maximum	Data traffic types	Fabric switches supporting unicast, multicast (255 groups), and broadcast
Certified maximum	Single Brocade FOS fabric: 56 domains, 19 hops, 6000 ports Single Brocade M-EOS fabric: 31 domains, three hops Larger fabrics certified as required; consult Brocade or OEM SAN design documents for configuration details	Media types	Hot-pluggable, industry-standard Small Form-factor Pluggable (SFP), LC connector; Short-Wavelength Laser (SWL) up to 500 meters (1640 feet); Long-Wavelength Laser (LWL) up to 10 km (6.2 mi); FC10-6 blade also supports Extended Long-Wavelength Laser (ELWL) up to 80 km (49.6 mi); distance depends on fiber-optic cable and port speed, CWDM SFPs (8 lambdas)
Port rates	1.063 Gbit/sec line speed, full duplex; 2.125 Gbit/sec line speed, full duplex; 4.25 Gbit/sec line speed, full duplex; auto-sensing of 1, 2, and 4 Gbit/sec port speeds; optionally programmable to fixed port speed; speed-matching between 1, 2, and 4 Gbit/sec ports and between 2, 4, and 8 Gbit/sec ports; 10.5 Gbit/sec line speed, full duplex, fixed port speed	Fabric services	Adaptive Networking Services: traffic isolation, ingress rate limiting (for FC8 blades only); Simple Name Server; Registered State Change Notification (RSCN); Alias Server (multicast); Brocade Advanced Zoning, Web Tools, Fabric Watch, Extended Fabrics, ISL Trunking, DPS, and Advanced Performance Monitoring
ISL Trunking	Up to eight ports per ISL trunk, delivering up to 64 Gbit/sec per ISL trunk using 8 Gbit/sec ports. Trunking is not supported with the FC10-6 (10 Gbit/sec) blade.	System security	FIPS 140-2 L2 Certifiable; management access security (RADIUS); Active Directory with LDAP



**BROCADE 48000 DIRECTOR SPECIFICATIONS (CONTINUED)**

High Availability	
Chassis power	Two AC-DC power supply modules, each delivering 1000 W DC, 2N redundancy; with Brocade FA4-18, FR4-18i, FC10-6, and FC4-16IP blades four AC-DC power supply modules are required for full redundancy
Cooling	Three blower assembly modules (two operational required)
Solution availability	Designed to provide 99.999% uptime capabilities to meet the highest availability standards  Hot-pluggable redundant power supplies, fans, processors, port blades, and optics; online diagnostics; non-disruptive firmware download and activation
Management	
Management capabilities	Fabric Manager; EFCM; Telnet; SNMP (FE MIB, FC Management MIB); FICON/CUP on FC4 and FC8 (16- and 32-port) blades, Web Tools; third-party applications utilizing the Brocade SMI Agent
Management access	10/100 Ethernet (RJ-45), in-band over Fibre Channel (requires fabric); two serial ports (DB-9) per control processor module
Mechanical Specifications	
Enclosure	Rear panel-to-door airflow
Width	43.74 cm (17.22 in)
Height	61.24 cm (24.11 in) for 14U
Depth	70.90 cm (27.90 in) without door 74.20 cm (29.20 in) with door
System weight	95 kg (210 lb) for 128-port configuration (eight 16-port blades, without media) 98 kg (216 lb) for: <ul style="list-style-type: none"><li>• 256-port configuration (eight 32-port blades, without media)</li><li>• 384-port configuration (eight 48-port blades, without media)</li><li>• 48-port configuration (eight 6-port blades, without media)</li></ul>

Environment		
Temperature	Operating: 0° C to 40° C (32° F to 104° F) Non-operating: –25° C to 70° C (–13° F to 158° F)	
Humidity	Operating: 5% to 85% non-condensing at 40° C (104° F)  Non-operating and storage (non-condensing): 0% to 93%	
Altitude	Up to 3000 meters (9800 feet)	
Shock	Operating: 20G, 11 ms, half sine 1G p-p, 5–500Hz, 1 octave min  Non-operating: 33G, 11 ms, half sine 2.4G p-p, 5–500Hz, 1 octave min	
Vibration	Operating: 5G p-p, 0 to 3 kHz at 1.0 octave min  Non-operating: 10G p-p, 0 to 5 kHz at 1.0 octave min	
Heat dissipation	710 W or 2425 BTU (525 W DC internal draw) to 1681 W or 5832 BTU (1261 W DC internal draw), subject to blade type	
CO <sub>2</sub> emissions	4,990 kg per year	
Power		
Supported power range	Nominal: 200 to 240 VAC nominal, 5.0 A, single phase  Operating: 180 to 264 VAC auto-sensing Note: 256-port configuration requires a maximum of 750 Volt-Amps	
In-rush current	40 Amps maximum, peak	
Frequency	47 to 63 Hz	
Regulatory Compliance		
Country/Region	Safety	EMI/EMC
Canada	CSA 60950	ICES 003 Class A
United States	UL 60950	FCC Part 15 Class A
Japan	IEC60950	VCCI Class A ITE
European Community	EN60950 TUV, NEMKO	EN55022 Level A EN55024
Korea	—	RRL
Russia	GOST	GOST
Australia/New Zealand	—	AS/NZS 3548 Class A
International	IEC 60950	CISPR 22 Class A

For information about supported SAN standards, visit [www.brocade.com/sanstandards](http://www.brocade.com/sanstandards)

For information about switch and device interoperability, visit [www.brocade.com/interoperability](http://www.brocade.com/interoperability)

**Corporate Headquarters**

San Jose, CA USA  
T: (408) 333-8000  
[info@brocade.com](mailto:info@brocade.com)

**European Headquarters**

Geneva, Switzerland  
T: +41 22 799 56 40  
[emea-info@brocade.com](mailto:emea-info@brocade.com)

**Asia Pacific Headquarters**

Singapore  
T: +65-6538-4700  
[apac-info@brocade.com](mailto:apac-info@brocade.com)

© 2008 Brocade Communications Systems, Inc. All Rights Reserved. 01/08 GA-DS-745-08

Brocade, Fabric OS, File Lifecycle Manager, MyView, and StorageX are registered trademarks and the Brocade B-wing symbol, DCX, and SAN Health are trademarks of Brocade Communications Systems, Inc., in the United States and/or in other countries. All other brands, products, or service names are or may be trademarks or service marks of, and are used to identify, products or services of their respective owners.

Notice: This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered or to be offered by Brocade. Brocade reserves the right to make changes to this document at any time, without notice, and assumes no responsibility for its use. This informational document describes features that may not be currently available. Contact a Brocade sales office for information on feature and product availability. Export of technical data contained in this document may require an export license from the United States government.



**BROCADE**