


SUPERMICR[®]

Mission Critical Server Solutions

• 2U Twin²_{TM} • 2.5" HDD Solutions • Blade Server • 93%+ Power-Efficiency

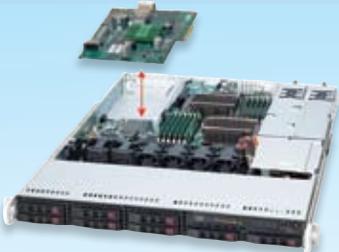

Universal I/O (UIO) Server

- Up to 3/7 add-on cards for 1U/2U
- Flexible I/O Configurations
- Optional SAS RAID, 10GbE, InfiniBand
- Gold Level High-Efficiency power supply



2U Twin²_{TM} SuperServer

- 4 DP nodes & up to 32 CPU cores in 2U
- 375 GFLOPS/kW Performance per Watt
- Hot-pluggable system
- Gold Level High-Efficiency (93%+) power supply



Dual-IOH SuperWorkstation

- Dual-IOH chipset design
- 4 PCI-E Gen 2.0 x16
- 18 DIMMs of DDR3 memory
- Gold Level High-Efficiency (93%+) power supply

Server Catalog April 2009

1U Twin™ Two Nodes in 1U

First in Twin-Server Design Best in Technology Innovation


Quad-core/Dual-core Xeon 5500 series processor support

Up to 96GB of Dual-Channel ECC Reg. DDRIII 1333/1066/800 in 12 DIMM sockets

Intel 82576 Gigabit Ethernet controller w/IOAT support

1 PCI-Express x16

Twin set of 3 high performance counter-rotating PWM fans

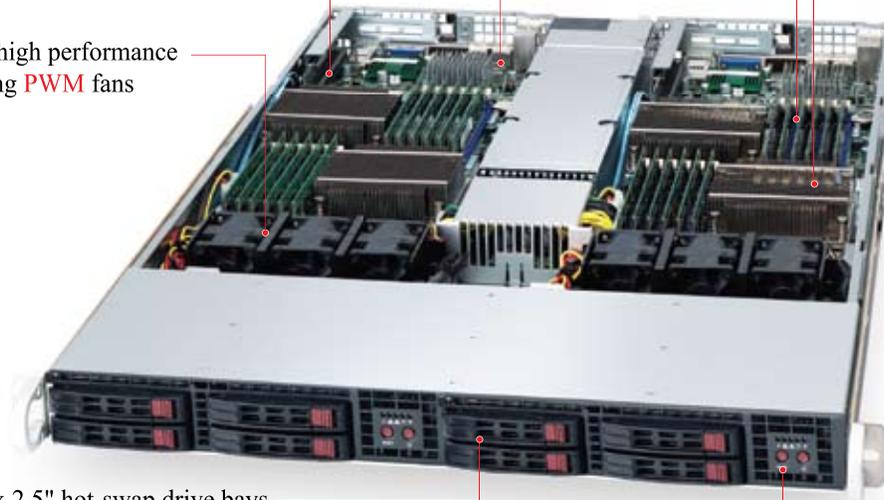

Twin set of 4 x 2.5" hot-swap drive bays

Twin set of power switches, reset buttons & 5 LED indicators



1200W High-Efficiency Gold Level Power supply w/PMBus

Twin set of 2x USB ports

Twin set of Dual Gigabit LAN

Twin set of COM/VGA output

Twin set of **ConnectX QDR 40 Gbs InfiniBand/QSFP connector**



SuperServer 1026TT-IBQF

These new 1U Twin™ servers deliver increased performance and energy savings with Intel® Tylersburg/Nehalem architecture and QPI up to 6.4GT/s. As with previous 1U Twin™ platforms, two DP serverboards fit into a single 1U chassis to provide two nodes per 1U of rack space or up to 84 nodes per 42U rack. Utilizing up to 96GB ECC Reg. DDR3 memory in 1.3GHz speed and optional InfiniBand connectivity, this 0.5U density makes these platforms an excellent choice for high-performance computing (HPC) clusters, server farms and other datacenters where space, cost, energy-efficiency and density are high priorities. Moreover, the 1U Twin™ servers feature a 1200W high-efficiency (93%+) power supply that is shared by both nodes to optimize utilization levels, further increasing energy savings and helping protect the environment.

2U Twin²™

375 GFLOPS/kW

Optimized Performance per Watt, System Density & TCO



- 4 nodes share one 2U chassis
- 4 sets of DP Quad-Core/Dual-Core 64-bit Xeon® 5500 series processors up to 95W
- 4 sets of 96GB DDR3 Reg. ECC 1333/1066/800 SDRAM

Optimized Performance per Watt

- High-efficiency Gold Level (93%+) power supply reduces power consumption
- High efficiency VRM and component designs improve power utilization
- Four 8cm fans with optimized air channel designs maximize cooling efficiency
- Shared chassis and power supply increase operating efficiency per node

Optimized System Density

- High density, compact design maximize rack space usage
- Modular design provides ease of system upgrade, installation and maintenance
- Less power cables and power strips reduce IT management overhead

Optimized TCO

- Optional redundant (1+1) power supplies increase system uptime
- Hot-pluggable MB, HDDs and power supply reduce maintenance and downtime
- PM Bus support for remote monitoring and optimal power management



Rear View

- 2x 1200W Gold Level high-efficiency redundant power supply
- 4 sets of PCI-E 2.0 x16 low-profile expansion slots
- 4 sets of dual Gigabit Ethernet LAN
- 4 sets of COM/VGA output
- 4 sets of InfiniBand controller ports (SS6026TT-BIBQF/BIBXF/BINFF)
- 4 sets of BMC supporting IPMI 2.0, media/KVM over LAN

Supermicro's new Tylersburg-based 2U Twin² server architecture further extends the smart server legacy and easy maintenance advantages of our innovative 1U Twin™ technology. Achieving an industry-leading 375 GFLOPS/kW* (on x86 platforms), the 2U Twin² delivers unrivaled performance-per-watt and performance-per-dollar. The optimized 93%+ high-efficiency power supply, plus newly designed CPU cooling components/air channel and updated motherboard voltage regulator module (VRM) designs all contribute to this server powerhouse. The hot-swappable modular design of the 2U Twin² facilitates easy system upgrade, installation and maintenance. Each node maintains independent full-function system control and management with its own front control panel with UID and three hot-swap 3.5" hard drive trays.

* Performance and peak power efficiency measures based on internal test results.

Dual-IOH GPU Optimized Workstation

Redundant Low-Noise, High-Efficiency Power Supply

- **1200W** High-Efficiency Gold Level Power supply w/PMBus
- 144GB of DDRIII 1333/1066/800 MHz SDRAM in **18 DIMMs**
- **Dual-IOH chipset design**
- Quad-Core/Dual-Core Xeon 5500 series



- 2 PCI-E 2.0 x16
4 PCI-E 2.0 x8 (1 in x16 slot)
1 PCI-E x4
- Dual LAN Gigabit Ethernet
Matrox G200eW graphics
7.1 HD Audio

- 5 x 8cm heavy duty fans with optimal fan speed control & air shroud; 100% cooling redundancy
- 6 x 3.5" hot-swap SATA drive
2 x 3.5" spare SATA drive bays
2 x 5.25" drive bays




SuperWorkstation 7046A-H+

The 7046A-H+ high-performance system is based on Intel's high-throughput 5520 chipset with QPI up to 6.4GT/s. Supporting the latest quad-core Xeon (Nehalem) processors, the system features an expanded PCI-Express bandwidth with dual Gen 2 PCI-Express x16 via dual IOH. Utilizing this setup, the system is optimized for graphics-intensive applications required in scientific, research and engineering disciplines. Specifically designed for this system, a super-quiet, high-efficiency 1200W power supply highlights Supermicro's green IT computing thought leadership as the only redundant, workstation-optimized power system available on the market today.

UIO

Up to 3 or 7 Add-on Cards for 1U or 2U Flexible I/O Configurations

Universal I/O

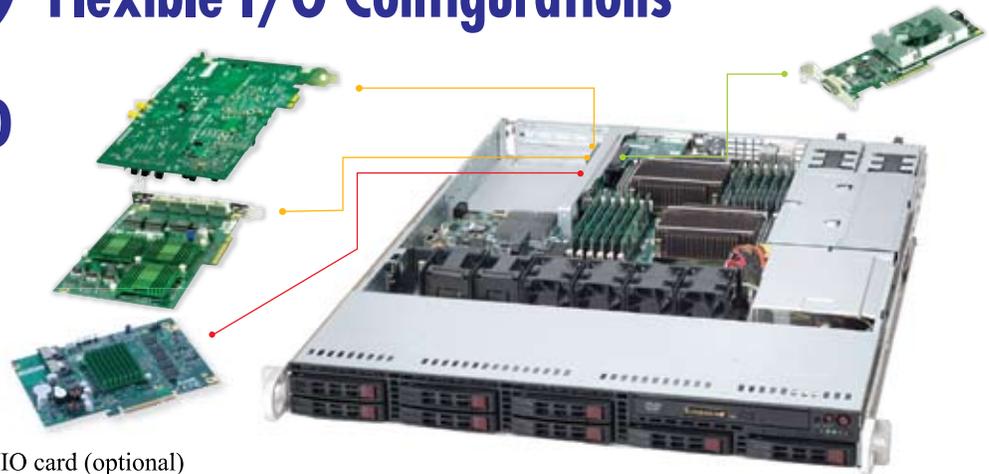

Supermicro SAS RAID 5 UIO card (optional)

| Model | Controller/IOP | SAS Port | RAID | Onboard Cache |
|---------------------------------|----------------|--|--|---|
| AOC-USAS-L8i | LSISAS 1068E | 8 ports, 3Gb/s per port 8 Internal | IT/HBA Mode | - |
| AOC-USASLP-L8i* | LSISAS 1068E | 8 ports, 3Gb/s per port 8 Internal, Low Profile | IT/HBA Mode | - |
| AOC-USAS-L4i | LSISAS 1068E | 8 ports, 3Gb/s per port 4 Internal, 4 External | RAID 0, 1, 10 | - |
| AOC-USAS-L4iR | LSISAS 1068E | 8 ports, 3Gb/s per port 4 Internal, 4 External | RAID 0, 1, 10 RAID 5 with iButton | - |
| NEW! AOC-USASLP-H8iR* | LSISAS 1078 | 8 ports, 3Gb/s per port 8 Internal | RAID 0, 1, 5, 6, 10, 50, 60 RAID 5 with iButton | 512MB DDR2 on-card cache w/ battery back-up option |
| AOC-USAS-H8iR | LSISAS 1078 | 8 ports, 3Gb/s per port 8 Internal | RAID 0, 1, 5, 6, 10, 50, 60 RAID 5 with iButton | 256MB DDR2 on-card cache w/ battery back-up option |
| AOC-USAS-H4iR | LSISAS 1078 | 8 ports, 3Gb/s per port 4 Internal, 4 External | RAID 0, 1, 5, 6, 10, 50, 60 RAID 5 with iButton | 256MB DDR2 on-card cache w/ battery back-up option |
| AOC-USAS-S4i | Intel IOP348 | 8 ports, 3Gb/s per port 4 Internal, 4 External | RAID 0, 1, 10 | 128Mb DDR2 on-card cache |
| AOC-USAS-S4iR | Intel IOP348 | 8 ports, 3Gb/s per port 4 Internal, 4 External | RAID 0, 1, 5, 10 | 256MB DDR2 on-card cache w/ battery back-up option |
| AOC-USAS-S8i | Intel IOP348 | 8 ports, 3Gb/s per port 8 Internal | RAID 0, 1, 10 | 128Mb DDR2 on-card cache |
| AOC-USAS-S8iR | Intel IOP348 | 8 ports, 3Gb/s per port 8 Internal | RAID 0, 1, 5, 10 | 256MB DDR2 on-card cache w/ battery back-up option |
| AOC-USASLP-S8i | Intel IOP348 | 8 ports, 3Gb/s per port 8 Internal, Low Profile | RAID 0, 1, 10 | 128Mb DDR2 on-card cache |
| AOC-USASLP-S8iR | Intel IOP348 | 8 ports, 3Gb/s per port 8 Internal, Low Profile | RAID 0, 1, 5, 6, 10, 50, 60 | 256MB DDR2 on-card cache w/ battery back-up option |

* Apply to 2U low-profile & above

***More than 20 choices: SAS RAID, 10GbE, InfiniBand, UIO Cards . . .
The freedom to build exactly what you need!***

Supermicro UIO Servers, in combination with riser cards and a UIO card, can provide numerous server configurations to accommodate the needs of your application. Our various riser cards for 1U and 2U chassis allow you to customize Supermicro UIO solutions to meet your storage and networking requirements. With a Supermicro UIO solution, you can customize high-performance, high-density and fault tolerant storage solutions with Supermicro UIO SAS RAID card products. Leveraging a variety of UIO Gigabit Ethernet Adapters, the UIO system improves network throughput as well as application performance. All Supermicro UIO solutions can be utilized without occupying existing PCI slots, leaving those slots free for additional expansion cards.



| MODEL | SuperServer 1026TT-IBQF SuperServer 1026TT-IBXF | SuperServer 1026TT-INFF | SuperServer 1026TT-TF SuperServer 1026TT-TL |
|-----------------------------------|--|--|---|
| Processor Support | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) |
| Key Applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications |
| Outstanding Features | <ul style="list-style-type: none"> • Two nodes in 1U • 40/20 Gigabit InfiniBand controller onboard • Double density and computing power • Independent power control & cooling control • Higher power utilization increases power supply efficiency • Reduces power cables and power strips • Save maintenance/management costs • IPMI 2.0 + KVM w/dedicated LAN • 1200W Gold-Level power supply | <ul style="list-style-type: none"> • Two nodes in 1U • Up to 16 Cores in 1U • InfiniBand controller onboard • Double density and computing power • Independent power control & cooling control • Higher power utilization increases power supply efficiency • Reduces power cables and power strips • Save maintenance/management costs • IPMI 2.0 + KVM w/dedicated LAN • 1200W Gold-Level power supply | <ul style="list-style-type: none"> • Two nodes in 1U • Up to 16 Cores in 1U • Double density and computing power • Independent power control & cooling control • Higher power utilization increases power supply efficiency • Reduces power cables and power strips • Save maintenance/management costs • IPMI 2.0 + KVM w/dedicated LAN • 1200W Gold-Level power supply |
| Chipset/ Serverboard | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER ● X8DTT-IBQF/IBXF | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER ● X8DTT-INFF | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER ● X8DTT-F/X8DTT-L |
| System Memory (Max.) | Twin set of 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs | Twin set of 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs | Twin set of 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs |
| Expansion Slots | Twin set of PCI-E 2.0 x16 via riser card (Low-profile) Twin set of ConnectX QDR 40Gbps InfiniBand w/QSFP connector (1026TT-IBQF) Twin set of ConnectX DDR 20Gbps InfiniBand w/QSFP connector (1026TT-IBXF) | Twin set of PCI-E 2.0 x16 via riser card (Low-profile) Twin set of InfiniHost III InfiniBand connector | Twin set of PCI-E 2.0 x16 via riser card (Low-profile) |
| Onboard Storage Controller | Twin set of Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Twin set of Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Twin set of Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) |
| Onboard LAN/VGA | Twin set of Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Twin set of Matrox G200eW graphics | Twin set of Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Twin set of Matrox G200eW graphics | Twin set of Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Twin set of Matrox G200eW graphics |
| Manageability | Twin set of IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | Twin set of IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | Twin set of IPMI 2.0 + KVM with dedicated LAN (1026TT-TF), Super Doctor® III, Watch Dog |
| Drive Bays | Twin set of 4 x 2.5" hot-swap drive bays | Twin set of 4 x 2.5" hot-swap drive bays | Twin set of 4 x 2.5" hot-swap drive bays |
| Peripheral Bays | N/A | N/A | N/A |
| Power Supply | 1200W high-efficiency Gold-level power supply w/PMBus | 1200W high-efficiency Gold-level power supply w/PMBus | 12 00W high-efficiency Gold-level power supply w/PMBus |
| Cooling System | Twin set of 3 x 4cm counter-rotating PWM fans w/optimal fan speed control & air shroud | Twin set of 3 x 4cm counter-rotating PWM fans w/optimal fan speed control & air shroud | Twin set of 3 x 4cm counter-rotating PWM fans w/optimal fan speed control & air shroud |
| Form Factor | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") |



**QPI & DDR3
UIO**

**QPI & DDR3
UIO**



**QPI & DDR3
UIO**

**QPI & DDR3
UIO**



| SuperServer 1026T-UF | SuperServer 1026T-URF | SuperServer 1026T-NTF | SuperServer 1026T-NTRF |
|---|---|--|--|
| Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) |
| HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications |
| <ul style="list-style-type: none"> • Universal I/O (UIO) slot • Up to 2 add-on cards + optional 3rd & 4th LAN ports • 96GB DDR3 SDRAM • Higher I/O performance • Flexible UIO SAS controller card • Eight 2.5" SAS drive bays • IPMI 2.0 + KVM with dedicated LAN • UID LED | <ul style="list-style-type: none"> • Universal I/O (UIO) slot • Up to 2 add-on cards + optional 3rd & 4th LAN ports • 96GB DDR3 SDRAM • Higher I/O performance • Flexible UIO SAS controller card • Eight 2.5" SAS drive bays • IPMI 2.0 + KVM with dedicated LAN • Redundant power supply • UID LED | <ul style="list-style-type: none"> • Up to 2 add-on cards + optional 3rd & 4th LAN ports • 96GB DDR3 SDRAM • IPMI 2.0 + KVM with dedicated LAN • UID LED | <ul style="list-style-type: none"> • Up to 2 add-on cards + optional 3rd & 4th LAN ports • 96GB DDR3 SDRAM • IPMI 2.0 + KVM with dedicated LAN • Redundant high-efficiency 650W power • UID LED |
| Intel® 5520 chipset with QPI up to 6.4GT/s SUPER ● X8DTU-F | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER ● X8DTU-F | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER ● X8DTU-F | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER ● X8DTU-F |
| 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs | 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs | 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs | 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs |
| Left slot: 1 PCI-E 2.0 x16 1 UIO Right slot: Optional 3rd & 4th Gigabit LAN port | Left slot: 1 PCI-E 2.0 x16 1 UIO Right slot: Optional 3rd & 4th Gigabit LAN port | Left slot: 1 PCI-E 2.0 x16 1 PCI-E x8 Right slot: Optional 3rd & 4th Gigabit LAN port | Left slot: 1 PCI-E 2.0 x16 1 PCI-E x8 Right slot: Optional 3rd & 4th Gigabit LAN ports |
| Intel® ICH10R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH10R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) |
| Dual LAN with Intel® 82576 Gigabit Ethernet controllers (w/IOAT support) Matrox G200eW graphics | Dual LAN with Intel® 82576 Gigabit Ethernet controllers (w/IOAT support) Matrox G200eW graphics | Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Matrox G200eW graphics | Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Matrox G200eW graphics |
| IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog |
| 8 x 2.5" hot-swap drive bays | 8 x 2.5" hot-swap drive bays | 5 x 2.5" hot-swap drive bays & 3 spare drive bays | 4 x 3.5" hot-swap drive bays & 3 spare drive bays |
| 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive |
| 560W high-efficiency Sliver Level power supply w/FC | Redundant high-efficiency 650W power supply w/FC | 560W high-efficiency Sliver Level power supply w/FC | Redundant high-efficiency 650W power supply w/FC |
| 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud |
| 1U Rackmount 437 x 43 x 597mm (17.2" x 1.7" x 23.5") | 1U Rackmount 437 x 43 x 597mm (17.2" x 1.7" x 23.5") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") |

**1U Twin™
SAS RAID 5
IPMI 2.0 onboard**



**1U Twin™
SAS RAID 5
10 Gigabit Ethernet**



**1U Twin™
SAS RAID 5**



| MODEL | SuperServer 1025TC-3FB | SuperServer 1025TC-10GB | SuperServer 1025TC-TB |
|-----------------------------------|--|---|---|
| Processor Support | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) |
| Key Applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications |
| Outstanding Features | <ul style="list-style-type: none"> • Two nodes in 1U • Up to 16 Cores in 1U • SAS controller and IPMI 2.0 onboard • Double density and computing power • Independent power control & cooling control • Higher power utilization increases power supply efficiency • Reduce power cables and power strips • Save maintenance/management costs | <ul style="list-style-type: none"> • Two nodes in 1U • Up to 16 Cores in 1U • 10 Gigabit Ethernet controller onboard • Double density and computing power • Independent power control & cooling control • Higher power utilization increases power supply efficiency • Reduce power cables and power strips • Save maintenance/management costs | <ul style="list-style-type: none"> • Two nodes in 1U • Up to 16 Cores in 1U • Double density and computing power • Independent power control & cooling control • Higher power utilization increases power supply efficiency • Reduce power cables and power strips • Save maintenance/management costs |
| Chipset/ Serverboard | Intel® 5100 chipset with 1.33GHz FSB/ SUPER● X7DCT-3F | Intel® 5100 chipset with 1.33GHz FSB/ SUPER● X7DCT-10G | Intel® 5100 chipset with 1.33GHz FSB/ SUPER● X7DCT |
| System Memory (Max.) | Twin set of 48 GB Dual-Channel ECC Reg. DDRII 667/533 in 6 DIMM sockets | Twin set of 48 GB Dual-Channel ECC Reg. DDRII 667/533 in 6 DIMM sockets | Twin set of 48 GB Dual-Channel ECC Reg. DDRII 667/533 in 6 DIMM sockets |
| Expansion Slots | Twin set of PCI-E x16 via riser card (Low-profile) | Twin set of PCI-E x16 via riser card (Low-profile) | Twin set of PCI-E x16 via riser card (Low-profile) |
| Onboard Storage Controller | Twin set of LSI® 1064 for 4 SAS ports RAID 0, 1, 10 Twin set of optional AOC-iButton68 (RAID5) Twin set of Intel® ICH9R for 4 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Twin set of Intel® ICH9R for 4 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Twin set of Intel® ICH9R for 4 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) |
| Onboard LAN/VGA | Twin set of Dual LAN with Intel® 82575EB Gigabit Ethernet controller (w/IOAT support) Twin set of Integrated 128MB server graphics | Twin set of Dual LAN with Intel® 82598EB 10 Gigabit & 82573V/L Gigabit Ethernet controller (w/IOAT support) Twin set of ATI® ES1000 32MB PCI graphics | Twin set of Dual LAN with Intel® 82573V/L Gigabit Ethernet controllers (w/IOAT support) Twin set of ATI® ES1000 32MB PCI graphics |
| Manageability | Twin set of IPMI 2.0 with dedicated LAN, Super Doctor® III, Watch Dog | Twin set of SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | Twin set of SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog |
| Drive Bays | Twin set of 4 x 2.5" hot-swap drive bays | Twin set of 4 x 2.5" hot-swap drive bays | Twin set of 4 x 2.5" hot-swap drive bays |
| Peripheral Bays | N/A | N/A | N/A |
| Power Supply | 780W high-efficiency power supply w/I²C | 780W high-efficiency power supply w/I²C | 780W high-efficiency power supply w/I²C |
| Cooling System | Twin set of 3 x 4cm counter-rotating PWM fans w/optimal fan speed control & air shroud | Twin set of 3 x 4cm counter-rotating PWM fans w/optimal fan speed control & air shroud | Twin set of 3 x 4cm counter-rotating PWM fans w/optimal fan speed control & air shroud |
| Form Factor | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") |

*World's First 1U
Silver Level 80 Plus
Certified*



| Model | SuperServer 1025W-UB | SuperServer 1025W-URB | SuperServer 1025C-URB |
|-----------------------------------|---|---|--|
| Processor Support | Quad-Core/Dual Core Intel® Xeon® processor 5400/5300/5200/5100LV series (LGA771) | Quad-Core/Dual Core Intel® Xeon® processor 5400/5300LV/5200/5100LV series (LGA771) | Quad-Core/Dual Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) |
| Key Applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications |
| Outstanding Features | <ul style="list-style-type: none"> • The World's First 1U Silver Level Power Supply • Less power consumption • Higher I/O performance • Flexible UIO SAS controller card • Eight 2.5" SAS drive bays • High computing performance | <ul style="list-style-type: none"> • Less power consumption • Higher I/O performance • Flexible UIO SAS controller card • Eight 2.5" SAS drive bays • High computing performance • Redundant high-efficiency power supply | <ul style="list-style-type: none"> • Less power consumption • Higher I/O performance • 2 full-height & full-length cards • Flexible UIO SAS controller card • Eight 2.5" SAS drive bays • 7 years product life • Redundant high-efficiency power supply |
| Chipset/ Serverboard | Intel® 5400 chipset with 1.6GHz FSB/ SUPER [®] X7DWU | Intel® 5400 chipset with 1.6GHz FSB/ SUPER [®] X7DWU | Intel® 5100 chipset with 1.33GHz FSB / SUPER [®] X7DCU |
| System Memory (Max.) | 64 GB Fully-buffered DIMM (FBD) DDRII 800/667/533 in 8 DIMM sockets 1.5V & 1.8V FB-DIMM supported | 64 GB Fully-buffered DIMM (FBD) DDRII 800/667/533 in 8 DIMM sockets 1.5V & 1.8V FB-DIMM supported | 48 GB Dual-Channel ECC Reg. DDRII 667/533 in 6 DIMM sockets |
| Expansion Slots | Right slot: 1 PCI-E Gen 2.0 x8 (low-profile) Left slot: 1 PCI-E x8 Gen. 2.0 & 1 UIO (full-height) | Right slot: 1 PCI-E Gen 2.0 x8 (low-profile) Left slot: 1 PCI-E x8 Gen. 2.0 & 1 UIO (full-height) | Right slot: 1 PCI-E x8 (low-profile) Left slot: 1 UIO & 1 PCI-E x8 (full-length) |
| Onboard Storage Controller | Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) Optional UIO SAS controller cards | Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) Optional UIO SAS controller cards | Intel® ICH9R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) Optional UIO SAS controller card |
| Onboard LAN/VGA | Dual LAN with Intel® 82575EB Gigabit Ethernet controllers (w/IOAT) ATI® ES1000 32MB PCI graphics | Dual LAN with Intel® 82575EB Gigabit Ethernet controllers (w/IOAT) ATI® ES1000 32MB PCI graphics | Dual LAN with Intel® 82575EB Gigabit Ethernet controllers (w/IOAT support) ATI® ES1000 32MB PCI graphics |
| Manageability | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| Drive Bays | 8 x 2.5" hot-swap drive bays | 8 x 2.5" hot-swap drive bays | 8 x 2.5" hot-swap drive bays |
| Peripheral Bays | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | N/A |
| Power Supply | 560W Silver Level power supply | Redundant high-efficiency 650W w/PC | Redundant high-efficiency 650W w/PC |
| Cooling System | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm counter-rotating PWM fans w/optimal fan speed control & air shroud |
| Form Factor | 1U Rackmount 437 x 43 x 597mm (17.2" x 1.7" x 23.5") | 1U Rackmount 437 x 43 x 597mm (17.2" x 1.7" x 23.5") | 1U Rackmount 437 x 43 x 597mm (17.2" x 1.7" x 23.5") |



| MODEL | SuperServer 6016TT-IBQF SuperServer 6016TT-IBXF | SuperServer 6016TT-INFF | SuperServer 6016TT-TF SuperServer 6016TT-TL |
|-----------------------------------|--|---|--|
| Processor Support | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) |
| Key Applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications |
| Outstanding Features | <ul style="list-style-type: none"> • Two nodes in 1U • 40/20 Gigabit InfiniBand controller onboard • Double density and computing power • Independent power & cooling control • Higher power utilization increases power supply efficiency • Reduce power cables and power strips • Save maintenance/management costs • IPMI 2.0 + KVM with dedicated LAN • 1200W Gold-level power supply | <ul style="list-style-type: none"> • Two nodes in 1U • InfiniBand controller onboard • Double density and computing power • Independent power control & cooling control • Higher power utilization increases power supply efficiency • Reduces power cables and power strips • Save maintenance/management costs • IPMI 2.0 + KVM with dedicated LAN • 1200W Gold-level power supply | <ul style="list-style-type: none"> • Two nodes in 1U • Double density and computing power • Independent power control & cooling control • Higher power utilization increases power supply efficiency • Reduces power cables and power strips • Save maintenance/management costs • IPMI 2.0 + KVM with dedicated LAN • 1200W Gold-level power supply |
| Chipset/ Serverboard | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER® X8DTT-IBQF/IBXF | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER® X8DTT-INFF | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER® X8DTT-F/X8DTT-L |
| System Memory (Max.) | Twin set of 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs | Twin set of 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs | Twin set of 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs |
| Expansion Slots | Twin set of PCI-E 2.0 x16 via riser card (Low-profile) Twin set of ConnectX QDR 40Gbps InfiniBand w/QSFP connector (6016T-IBQF) Twin Set of ConnectX DDR 20Gbps InfiniBand w/QSFP connector (6016T-IBXF) | Twin set of PCI-E 2.0 x16 via riser card (Low-profile) Twin set of InfiniHost III InfiniBand connector | Twin set of PCI-E 2.0 x16 via riser card (Low-profile) |
| Onboard Storage Controller | Twin set of Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Twin set of Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Twin set of Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) |
| Onboard LAN/VGA | Twin set of Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Twin set of Matrox G200eW graphics | Twin set of Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Twin set of Matrox G200eW graphics | Twin set of Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Twin set of Matrox G200eW graphics |
| Manageability | Twin set of IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | Twin set of IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | Twin set of IPMI 2.0 + KVM with dedicated LAN (6016TT-TF), Super Doctor® III, Watch Dog |
| Drive Bays | Twin set of 2 x 3.5" hot-swap drive bays | Twin set of 2 x 3.5" hot-swap drive bays | Twin set of 2 x 3.5" hot-swap drive bays |
| Peripheral Bays | N/A | N/A | N/A |
| Power Supply | 1200W high-efficiency Gold-level power supply w/PMBus | 1200W high-efficiency Gold-level power supply w/PMBus | 1200W high-efficiency Gold-level power supply w/PMBus |
| Cooling System | Twin set of 3 x 4cm counter-rotating PWM fans w/optimal fan speed control & air shroud | Twin set of 3 x 4cm counter-rotating PWM fans w/optimal fan speed control & air shroud | Twin set of 3 x 4cm counter-rotating PWM fans w/optimal fan speed control & air shroud |
| Form Factor | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") |



| SuperServer 6016T-3RF | SuperServer 6016T-URF/UF | SuperServer 6016T-NTF | SuperServer 6016T-NTRF |
|--|--|--|--|
| Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) |
| HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications |
| <ul style="list-style-type: none"> • 4 hot-swap drive bays • 48 GB DDR3 memory • 2 Gigabit Ethernet ports • IPMI 2.0 + KVM with dedicated LAN • UID LED | <ul style="list-style-type: none"> • Universal I/O (UIO) slot • 2 add-on cards & optional 3rd & 4th LAN port • 4 hot-swap drive bays • 96 GB DDR3 memory • 2 Gigabit Ethernet ports • IPMI 2.0 + KVM with dedicated LAN • UID LED | <ul style="list-style-type: none"> • 2 add-on cards & optional 3rd & 4th LAN port • 4 hot-swap drive bays • 96 GB DDR3 memory • 2 Gigabit Ethernet ports • IPMI 2.0 + KVM with dedicated LAN • UID LED | <ul style="list-style-type: none"> • 2 add-on cards & optional 3rd & 4th LAN port • 4 hot-swap drive bays • 96 GB DDR3 memory • 2 Gigabit Ethernet ports • IPMI 2.0 + KVM with dedicated LAN • Redundant power supply • UID LED |
| Intel® 5500 chipset with QPI up to 6.4GT/s SUPER ● X8DTW-3F | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER ● X8DTU-F | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER ● X8DTU-F | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER ● X8DTU-F |
| 48GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs | 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs | 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs | 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs |
| Left slot: 1 PCI-E 2.0 x16 supports riser card Right slot: Optional 3rd & 4th LAN port | Left slot: 1 PCI-E 2.0 x16 1 UIO Right slot: Optional 3rd & 4th LAN port | Left slot: 1 PCI-E 2.0 x16 1 PCI-E x8 Right slot: Optional 3rd & 4th LAN port | Left slot: 1 PCI-E 2.0 x16 1 PCI-E x8 Right slot: Optional 3rd & 4th LAN port |
| LSI® 1064E 4-port SAS controller Optional AOC-iButton68 (RAID 5) RAID 0, 1, 10 Intel® ICH10R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH10R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) Optional UIO SAS controller cards | Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) |
| Dual LAN with Intel® 82574L Gigabit Ethernet controller (w/IOAT support) Matrox G200eW graphics | Dual LAN with Intel® 82576 Gigabit Ethernet controllers (w/IOAT support) Matrox G200eW graphics | Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Matrox G200eW graphics | Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Matrox G200eW graphics |
| IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog |
| 4 x 3.5" hot-swap drive bays | 4 x 3.5" hot-swap drive bays | 4 x 3.5" hot-swap drive bays | 4 x 3.5" hot-swap drive bays |
| 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive |
| Redundant high-efficiency 650W power supply w/I ² C | 6016T-URF: Redundant high-efficiency 650W w/I ² C 6016T-UF: 560W high-efficiency | 560W high-efficiency power supply | Redundant high-efficiency 650W power supply w/I ² C |
| 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud |
| 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") |

1U Twin™
Cost-effective
IPMI 2.0 onboard



1U Twin™
10 Gigabit Ethernet



1U Twin™



| MODEL | SuperServer 6015TC-LFTB | SuperServer 6015TC-10GB | SuperServer 1025TC-TB |
|-----------------------------------|--|--|---|
| Processor Support | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) |
| Key Applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications |
| Outstanding Features | <ul style="list-style-type: none"> • Two nodes in 1U • Up to 16 Cores in 1U • Double density and computing power • Independent power control & cooling control • Higher power utilization increases power supply efficiency • Reduce power cables and power strips • Save maintenance/management costs • IPMI 2.0 + KVM with dedicated LAN | <ul style="list-style-type: none"> • Two nodes in 1U • Up to 16 Cores in 1U • 10G Gigabit Ethernet controller onboard • Double density and computing power • Independent power control & cooling control • Higher power utilization increases power supply efficiency • Reduce power cables and power strips • Save maintenance/management costs • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN | <ul style="list-style-type: none"> • Two nodes in 1U • Up to 16 Cores in 1U • Double density and computing power • Independent power control & cooling control • Higher power utilization increases power supply efficiency • Reduce power cables and power strips • Save maintenance/management costs • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN |
| Chipset/ Serverboard | Intel® 5100 chipset with 1.33GHz FSB/ SUPER● X7DCT-LF | Intel® 5100 chipset with 1.33GHz FSB/ SUPER● X7DCT-10G | Intel® 5100 chipset with 1.33GHz FSB/ SUPER● X7DCT |
| System Memory (Max.) | Twin set of 48 GB Dual-Channel ECC Reg. DDRII 667/533 in 6 DIMM sockets | Twin set of 48 GB Dual-Channel ECC Reg. DDRII 667/533 in 6 DIMM sockets | Twin set of 48 GB Dual-Channel ECC Reg. DDRII 667/533 in 6 DIMM sockets |
| Expansion Slots | Twin set of PCI-E x16 via riser card | Twin set of PCI-E x16 via riser card (Low-profile) | Twin set of PCI-E x16 via riser card (Low-profile) |
| Onboard Storage Controller | Twin set of Intel® ICH9R for 4 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Twin set of Intel® ICH9R for 4 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Twin set of Intel® ICH9R for 4 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) |
| Onboard LAN/VGA | Twin set of Dual LAN with Intel® 82575EB Gigabit Ethernet controller (w/IOAT support) Twin set of Integrated 128MB server graphics | Twin set of Dual LAN with Intel® 82598EB 10 Gigabit & 82573V/L Gigabit Ethernet controller (w/IOAT support) Twin set of ATI® ES1000 32MB PCI graphics | Twin set of Dual LAN with Intel® 82573V/L Gigabit Ethernet controllers (w/IOAT support) Twin set of ATI® ES1000 32MB PCI graphics |
| Manageability | Twin set of IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | Twin set of SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | Twin set of SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog |
| Drive Bays | Twin set of 2 x 3.5" hot-swap drive bays | Twin set of 2 x 3.5" hot-swap drive bays | Twin set of 2 x 3.5" hot-swap drive bays |
| Peripheral Bays | N/A | N/A | N/A |
| Power Supply | 780W high-efficiency power supply w/FC | 780W high-efficiency power supply w/FC | 780W high-efficiency power supply w/FC |
| Cooling System | Twin set of 3 x 4cm counter-rotating PWM fans w/optimal fan speed control & air shroud | Twin set of 3 x 4cm counter-rotating PWM fans w/optimal fan speed control & air shroud | Twin set of 3 x 4cm counter-rotating PWM fans w/optimal fan speed control & air shroud |
| Form Factor | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") |

1U Twin™
20 Gbps InfiniBand
1.6GHz FSB



1U Twin™
1.6GHz FSB



1U Twin™



1U Twin™



| SuperServer 6015TW-INFV SuperServer 6015TW-INFB | SuperServer 6015TW-TV SuperServer 6015TW-TB | SuperServer 6015T-INFV SuperServer 6015T-INFB | SuperServer 6015T-TV SuperServer 6015T-TB |
|--|--|--|--|
| Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300LV/5200/5100LV series (LGA771) | Quad-Core/Dual Core Intel® Xeon® processor 5400/5300LV/5200/5100LV series (LGA771) | Quad-Core/Dual Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) |
| HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications |
| <ul style="list-style-type: none"> • Two nodes in 1U • Up to 16 Cores in 1U • Double density and computing power • Independent power control • Independent cooling control • Higher power utilization increases power supply efficiency • Reduce power cables and power strips • Save maintenance/management costs | <ul style="list-style-type: none"> • Two nodes in 1U • Up to 16 Cores in 1U • Double density and computing power • Independent power control • Independent cooling control • Higher power utilization increases power supply efficiency • Reduce power cables and power strips • Save maintenance/management costs | <ul style="list-style-type: none"> • Two nodes in 1U • Up to 16 Cores in 1U • Double density and computing power • Independent power control • Independent cooling control • Higher power utilization increases power supply efficiency • Reduce power cables and power strips • Save maintenance/management costs | <ul style="list-style-type: none"> • Two nodes in 1U • Up to 16 Cores in 1U • Double density and computing power • Independent power control • Independent cooling control • Higher power utilization increases power supply efficiency • Reduce power cables and power strips • Save maintenance/management costs |
| Intel® 5400 chipset with 1.6GHz FSB/ SUPER●® X7DWT-INF | Intel® 5400 chipset with 1.6GHz FSB/ SUPER●® X7DWT | Intel® 5000P chipset with 1.33GHz FSB/ SUPER●® X7DBT-INF | Intel® 5000P chipset with 1.33GHz FSB/ SUPER●® X7DBT |
| Twin set of 64 GB Fully-buffered DIMM (FBD) DDRII 800/667 in 8 DIMM sockets 1.5V & 1.8V FB-DIMM supported | Twin set of 64 GB Fully-buffered DIMM (FBD) DDRII 800/667 in 8 DIMM sockets 1.5V & 1.8V FB-DIMM supported | Twin set of 32 GB Fully-buffered DIMM (FBD) DDRII 800/667 in 8 DIMM sockets | Twin set of 32 GB Fully-buffered DIMM (FBD) DDRII 800/667 in 8 DIMM sockets |
| Twin set of 1 PCI-E Gen 2.0 x16 via riser card | Twin set of 1 PCI-E Gen 2.0 x8 via riser card | Twin set of PCI-E x8 via riser card | Twin set of PCI-E x8 via riser card |
| Twin set of Intel® ESB2 for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) Twin set of Mellanox 20Gbps Infiniband Controller | Twin set of Intel® ESB2 for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Twin set of Intel® ESB2 for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 Twin set of Mellanox 20Gbps Infiniband Controller (6015T-INF (V/B) only) | Twin set of Intel® ESB2 for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 |
| Twin set of Dual LAN with Intel® 82563 Gigabit Ethernet controllers (w/IOAT) Twin set of ATI® ES1000 32MB PCI graphics | Twin set of Dual LAN with Intel® 82563 Gigabit Ethernet controllers (w/IOAT) Twin set of ATI® ES1000 32MB PCI graphics | Twin set of Dual LAN with Intel® 82563 Gigabit Ethernet controllers Twin set of ATI® ES1000 16MB PCI graphics | Twin set of Dual LAN with Intel® 82563 Gigabit Ethernet controllers Twin set of ATI® ES1000 16MB PCI graphics |
| Twin set of SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | Twin set of SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | Twin set of SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | Twin set of SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog |
| Twin set of 2 x 3.5" hot-swap drive bays | Twin set of 2 x 3.5" hot-swap drive bays | Twin set of 2 x 3.5" hot-swap drive bays | Twin set of 2 x 3.5" hot-swap drive bays |
| N/A | N/A | N/A | N/A |
| 980W high-efficiency power supply w/FC |
| Twin set of 3 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | Twin set of 3 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | Twin set of 3 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | Twin set of 3 x 4cm counter-rotating fans w/optimal fan speed control & air shroud |
| 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") |



| MODEL | SuperServer 6015C-URV/UV SuperServer 6015C-URB/UB | SuperServer 6015C-NTRV/NTV SuperServer 6015C-NTRB/NTB | SuperServer 6015C-Ni/NiB |
|-----------------------------------|--|---|---|
| Processor Support | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) |
| Key Applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications |
| Outstanding Features | <ul style="list-style-type: none"> • Universal I/O (U10) slot • Less power consumption • Higher I/O performance • Flexible U10 SAS controller card • 7 years product life • Redundant high-efficiency power supply | <ul style="list-style-type: none"> • Supports up to 3 add-on cards • Less power consumption • Higher I/O performance • Flexible U10 SAS controller card • 7 years product life • Redundant high-efficiency power supply | <ul style="list-style-type: none"> • Supports up to 3 add-on cards • Less power consumption • Higher I/O performance • Flexible U10 SAS controller card • 7 years product life • High-efficiency power supply |
| Chipset/ Serverboard | Intel® 5100 chipset with 1.33GHz FSB / SUPER● X7DCU | Intel® 5100 chipset with 1.33GHz FSB / SUPER● X7DCU | Intel® 5100 chipset with 1.33GHz FSB / SUPER● X7DCT |
| System Memory (Max.) | 48 GB Dual-Channel ECC Reg. DDRII 667/533 in 6 DIMM sockets | 48 GB Dual-Channel ECC Reg. DDRII 667/533 in 6 DIMM sockets | 48 GB Dual-Channel ECC Reg. DDRII 667/533 in 6 DIMM sockets |
| Expansion Slots | Right slot: 1 PCI-E x8 (low-profile) Left slot: 1 U10 & 1 PCI-E x8 (full-length) | Right slot: 1 PCI-E x8 (low-profile) Left slot: 1 U10 & 1 PCI-E x8 (full-length) | Right slot: 1 PCI-E x8 (low-profile) Left slot: 2 PCI-E x8 (full-length) |
| Onboard Storage Controller | Intel® ICH9R for 4 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) Optional U10 SAS controller card | Intel® ICH9R for 4 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH9R for 4 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) |
| Onboard LAN/VGA | Dual LAN with Intel® 82575EB Gigabit Ethernet controllers (w/IOAT support) ATI® ES1000 32MB PCI graphics | Dual LAN with Intel® 82575EB Gigabit Ethernet controllers (w/IOAT support) ATI® ES1000 32MB PCI graphics | Dual LAN with Intel® 82575EB Gigabit Ethernet controllers (w/IOAT support) ATI® ES1000 32MB PCI graphics |
| Manageability | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog |
| Drive Bays | 4 x 3.5" hot-swap drive bays | 4 x 3.5" hot-swap drive bays | 3 x 3.5" internal drive bays |
| Peripheral Bays | N/A | N/A | N/A |
| Power Supply | 6015C-UR: Redundant high-efficiency 650W w/I ² C 6015C-U: High-efficiency 560W w/I ² C | 6015C-NTR: Redundant high-efficiency 650W w/I²C 6015C-NT: High-efficiency 560W w/I ² C | 520W high-efficiency power supply w/I ² C |
| Cooling System | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 2 x 10cm heavy-duty blowers w/optimal fan speed control |
| Form Factor | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 426 x 43 x 650mm (16.8" x 1.7" x 25.6") |



| SuperServer 6015W-URV/URB | SuperServer 6015W-UV/UB | SuperServer 6015W-NTRV/NTRB SuperServer 6015W-NTV/NTB | SuperServer 6015W-Ni/NiB |
|--|--|--|---|
| Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300LV/5200/5100LV series (LGA771) | Quad-Core/Dual Core Intel® Xeon® processor 5400/5300LV/5200/5100LV series (LGA771) | Quad-Core/Dual Core Intel® Xeon® processor 5400/5300LV/5200/5100LV series (LGA771) | Quad-Core/Dual Core Intel® Xeon® processor 5400/5300LV/5200/5100LV series (LGA771) |
| High-end enterprise server, SQL server, high performance computing cluster (HPCC) | High-end enterprise server, SQL server, high performance computing cluster (HPCC) | High-end enterprise server, SQL server, high performance computing cluster (HPCC) | High-end enterprise server, SQL server, high performance computing cluster (HPCC) |
| <ul style="list-style-type: none"> • Universal I/O (UIO) slot • 4 hot-swap drive bays • 64 GB FB-DIMM memory • 2 Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID LED • High efficiency redundant power supply | <ul style="list-style-type: none"> • Universal I/O (UIO) slot • 4 hot-swap drive bays • 64 GB FB-DIMM memory • 2 Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID LED | <ul style="list-style-type: none"> • Support up to 3 add-on cards • Universal I/O (UIO) slot • 4 hot-swap drive bays • 64 GB FB-DIMM memory • 2 Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID LED | <ul style="list-style-type: none"> • Support up to 3 add-on cards • Universal I/O (UIO) slot • 3 fixed drive bays • 64 GB FB-DIMM memory • 2 Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID LED |
| Intel® 5400 chipset with 1.6GHz FSB/SUPER● X7DWU | Intel® 5400 chipset with 1.6GHz FSB/SUPER● X7DWU | Intel® 5400 chipset with 1.6GHz FSB/SUPER● X7DWU | Intel® 5400 chipset with 1.6GHz FSB/SUPER● X7DWU |
| 64 GB Fully-buffered DIMM (FBD) DDRII 800/667 in 8 DIMM sockets 1.5V & 1.8V FB-DIMM supported | 64 GB Fully-buffered DIMM (FBD) DDRII 800/667 in 8 DIMM sockets 1.5V & 1.8V FB-DIMM supported | 64 GB Fully-buffered DIMM (FBD) DDRII 800/667 in 8 DIMM sockets 1.5V & 1.8V FB-DIMM supported | 64 GB Fully-buffered DIMM (FBD) DDRII 800/667 in 8 DIMM sockets 1.5V & 1.8V FB-DIMM supported |
| Right slot: 1 PCI-E x8 (low-profile) Left slot: 1 Universal I/O (UIO) slot via riser card 1 PCI-E x8 | Right slot: 1 PCI-E x8 (low-profile) Left slot: 1 Universal I/O (UIO) slot via riser card 1 PCI-E x8 | Right slot: 1 PCI-E x8 (low-profile) Left slot: 2 PCI-E x8 | Right slot: 1 PCI-E x8 (low-profile) Left slot: 2 PCI-E x8 or 1 PCI-E x16 (optional) |
| Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) Optional UIO SAS controller cards | Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) Optional UIO SAS controller cards | Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) Optional UIO SAS controller cards | Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) |
| Dual LAN with Intel® 82575EB Gigabit Ethernet controllers (w/IOAT II) ATI® ES1000 32MB PCI graphics | Dual LAN with Intel® 82575EB Gigabit Ethernet controllers (w/IOAT II) ATI® ES1000 32MB PCI graphics | Dual LAN with Intel® 82575EB Gigabit Ethernet controllers (w/IOAT II) ATI® ES1000 32MB PCI graphics | Dual LAN with Intel® 82575EB Gigabit Ethernet controllers (w/IOAT II) ATI® ES1000 32MB PCI graphics |
| SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog |
| 4 x 3.5" hot-swap drive bays | 4 x 3.5" hot-swap drive bays | 4 x 3.5" hot-swap drive bays | 3 x 3.5" internal drive bays |
| 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | N/A |
| Redundant high-efficiency 650W w/TC | 560W high-efficiency power supply | 6015W-NTR: Redundant high-efficiency 650W power supply w/TC 6015W-NT: 560W high-efficiency power supply | 520W high-efficiency power supply |
| 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 2 x 10cm heavy-duty blowers |
| 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 426 x 43 x 650mm (16.8" x 1.7" x 25.6") |



| MODEL | SuperServer 6015B-URV/UV SuperServer 6015B-URB/UB | SuperServer 6015B-NTRV/NTV SuperServer 6015B-NTRB/NTB | SuperServer 6015B-Ni/NiB |
|-----------------------------------|--|---|---|
| Processor Support | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) |
| Key Applications | High-end enterprise server, SQL server, high performance computing cluster (HPCC) | High-end enterprise server, SQL server, high performance computing cluster (HPCC) | High-end enterprise server, SQL server, high performance computing cluster (HPCC) |
| Outstanding Features | <ul style="list-style-type: none"> • Universal I/O (UIO) slot • 4 hot-swap drive bays • 32 GB FB-DIMM memory • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID LED | <ul style="list-style-type: none"> • Supports up to 3 add-on cards • 4 hot-swap drive bays • 32 GB FB-DIMM memory • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID LED | <ul style="list-style-type: none"> • Supports up to 3 add-on cards • 4 hot-swap drive bays • 32 GB FB-DIMM memory • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID LED |
| Chipset/ Serverboard | Intel® 5000P chipset with 1.33GHz FSB/ SUPER● X7DBU | Intel® 5000P chipset with 1.33GHz FSB/ SUPER● X7DBU | Intel® 5000P chipset with 1.33GHz FSB/ SUPER● X7DBU |
| System Memory (Max.) | 32 GB Fully-buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 32 GB Fully-buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 32 GB Fully-buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets |
| Expansion Slots | Right slot: 1 Universal PCI-X 133 or PCI-E x8 Left slot: 1 Universal I/O (UIO) slot via riser card 1 PCI-E x8 | Right slot: 1 Universal PCI-X 133 or PCI-E x8 Left slot: 2 PCI-E x8 | Right slot: 1 Universal PCI-X 133 or PCI-E x8 Left slot: 2 PCI-E x8 |
| Onboard Storage Controller | Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 Optional SAS controller cards | Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 | Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 |
| Onboard LAN/VGA | Dual LAN with Intel® 82563 Gigabit Ethernet controllers ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563 Gigabit Ethernet controllers ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563 Gigabit Ethernet controllers ATI® ES1000 16MB PCI graphics controller |
| Manageability | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog |
| Drive Bays | 4 x 3.5" hot-swap drive bays | 4 x 3.5" hot-swap drive bays | 3 x 3.5" internal drive bays |
| Peripheral Bays | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | N/A |
| Power Supply | 6015B-URV/URB: Redundant high-efficiency 650W power supply w/I ² C 6015B-UV/UB: 560W high-efficiency power supply | 6015B-NTR: Redundant high-efficiency 650W power supply w/I ² C 6015B-NT: High-efficiency 560W w/I ² C | 520W high-efficiency power supply w/I ² C |
| Cooling System | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 2 x 10cm heavy-duty blowers w/optimal fan speed control |
| Form Factor | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 426 x 43 x 650mm (16.8" x 1.7" x 25.6") |

PCI-E x16



2U in 1U SAS
3+1 Add-on Cards



2U in 1U SAS
4+1 Add-on Cards



2U in 1U SAS
4+1 Add-on Cards



| SuperServer 6015A-NTV/NTB | SuperServer 6015X-3V/3B | SuperServer 6015X-8V/8B | SuperServer 6015W-TV/TB |
|--|---|---|---|
| Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) |
| High-end enterprise server, SQL server, high performance computing cluster (HPCC) | High-end enterprise server, SQL server, high performance computing cluster (HPCC) | High-end enterprise server, SQL server, high performance computing cluster (HPCC) | High-end enterprise server, SQL server, high performance computing cluster (HPCC) |
| <ul style="list-style-type: none"> • PCI-E x16 slot support • 4 hot-swap drive bays • 32 GB FB-DIMM memory • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID LED | <ul style="list-style-type: none"> • Up to 3 expansion slots in 1U • Universal PCI-X or PCI-Express • 32 GB FBDIMM memory • 2 Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • Front Access 700W high-efficiency power | <ul style="list-style-type: none"> • Up to 4 expansion slots in 1U • 3 SCA drive bays with SAF-TE • Universal PCI-X or PCI-Express • 32 GB FBDIMM memory • 2 Gigabit Ethernet ports & ZCR support • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • Front Access 700W high-efficiency power | <ul style="list-style-type: none"> • Up to 4 expansion slots in 1U • Universal PCI-X or PCI-Express • 32 GB FBDIMM memory • 2 Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • Front Access 700W high-efficiency power |
| Intel® 5000X chipset with 1.33GHz FSB/ SUPER●® X7DGU | Intel® 5000P chipset with 1.33GHz FSB/ SUPER●® X7DBX-i | Intel® 5000P chipset with 1.33GHz FSB/ SUPER●® X7DBX-8 | Intel® 5000P chipset with 1.33GHz FSB/ SUPER●® X7DBX-i |
| 32 GB Fully-buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 32 GB Fully-buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 32 GB Fully-buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 32 GB Fully-buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets |
| Right slot: 1 Universal PCI-X 133 or PCI-E x8 Left slot: 1 PCI-E x16 | 1 Universal PCI-X 133 MHz (full-length)/ PCI-E x8 (full-length) 1 Universal PCI-X 100 MHz (low-profile)/ PCI-E x4 (low-profile) 1 PCI-E x8 | 1 Universal PCI-X 133 MHz (full-length)/ PCI-E x8 (full-length) 1 Universal PCI-X 100 MHz (low-profile)/ PCI-E x4 (low-profile) 1 PCI-E x8 & 1 PCI-E x4 (full-length)/ 2 PCI-X 133MHz with optional riser card RSC-R1UEP-A2X (full-length) | 1 Universal PCI-X 133 MHz (full-length)/ PCI-E x8 (full-length) 1 Universal PCI-X 100 MHz (low-profile)/ PCI-E x4 (low-profile) 1 PCI-E x8 & 1 PCI-E x4 (full-length)/ 2 PCI-X 133MHz with optional riser card RSC-R1UEP-A2X (full-length) |
| Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | AOC-USAS-L4i SAS controller card installed support RAID 0, 1, 10 | Adaptec® 7902W 2-channel Ultra320 SCSI Optional AOC-LPZCR3 (RAID 5) Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 |
| Dual LAN with Intel® 82563 Gigabit Ethernet controllers ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller |
| SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | SIM1U-3B slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | SIM1U-3B slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | SIM1U-3B slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog |
| 4 x 3.5" hot-swap drive bays | 3 x 3.5" hot-swap SAS drive bays with SES2 | 3 x 3.5" hot-swap Ultra320 SCA drive bays with SAF-TE | 3 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) |
| 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive |
| 560W high-efficiency power supply | 700W high-efficiency power supply w/FC | 700W high-efficiency power supply w/FC | 700W high-efficiency power supply w/FC |
| 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 5 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 5 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 5 x 4cm counter-rotating fans w/optimal fan speed control & air shroud |
| 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") |



| MODEL | SuperServer 6015P-8R/8RB SuperServer 6015P-8/8B | SuperServer 6015P-T/TB SuperServer 6015P-TR/TRB | SuperServer 6015B-8+V/8+B |
|-----------------------------|--|--|--|
| Processor Support | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300LV/5200/5100LV series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) |
| Key Applications | High-end enterprise server, SQL server, high performance computing cluster (HPCC) | High-end enterprise server, SQL server, high performance computing cluster (HPCC) | High-end enterprise server, SQL server, high performance computing cluster (HPCC) |
| Outstanding Features | <ul style="list-style-type: none"> • 4 SCA drive bays with SAF-TE • Universal PCI-X or PCI-Express • 32 GB FB-DIMM memory • 2 Gigabit Ethernet ports • ZCR support • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) • 700W redundant high-efficiency power | <ul style="list-style-type: none"> • 4 SATA drive bays with SGPIO • Universal PCI-X or PCI-Express • 32 GB FB-DIMM memory • 2 Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • 700W redundant high-efficiency power | <ul style="list-style-type: none"> • 4 SCA drive bays with SAF-TE • Universal PCI-X or PCI-Express • 64 GB FB-DIMM memory • 2 Gigabit Ethernet ports • ZCR support • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) • 700W high-efficiency power |
| Chipset/ Serverboard | Intel® 5000P chipset with 1.33GHz FSB/ SUPER® X7DBP-8 | Intel® 5000P chipset with 1.33GHz FSB/ SUPER® X7DBP-i | Intel® 5000P chipset with 1.33GHz FSB/ SUPER® X7DBR-8+ |
| System Memory (Max.) | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 64 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 16 DIMM sockets |
| Expansion Slots | 1 Universal PCI-X 133 MHz (full-length)/ PCI-E x8 (full-length) 1 Universal PCI-X 100 MHz (low-profile)/ PCI-E x8 (low-profile) | 1 Universal PCI-X 133 MHz (full-length)/ PCI-E x8 (full-length) 1 Universal PCI-X 133 MHz (low-profile)/ PCI-E x8 (low-profile) | 1 Universal PCI-X 133 MHz (full-length)/ PCI-Express x8 (full-length) |
| Onboard SATA RAID | Adaptec® 7902W 2-CH U320 SCSI Optional AOC-LPZCR3 (RAID 5) Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Adaptec® 7902W 2-CH Ultra320 SCSI Optional AOC-SOZCR1 (RAID 5) Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 |
| Onboard LAN/VGA | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller |
| Manageability | SIM1U slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | SIM1U slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| Drive Bays | 4 x 3.5" hot-swap Ultra320 SCA drive bays with SAF-TE | 4 x 3.5" hot-swap SATA drive bays with enclosure management w/SGPIO | 4 x 3.5" hot-swap Ultra320 SCA drive bays with SAF-TE |
| Peripheral Bays | 1 slim DVD-ROM drive & 1 slim floppy | 1 slim DVD-ROM drive & 1 slim floppy | 1 slim DVD-ROM drive |
| Power Supply | 6015P-8R (B): 700W redundant high- efficiency hot-swap power w/FC 6015P-8 (B): 700W high-efficiency cold-swap power supply w/FC | 6015P-TR(B): 700W redundant high- efficiency hot-swap power supply w/FC 6015P-T(B): 700W high-efficiency power supply w/FC | 700W high-efficiency power supply w/FC |
| Cooling System | 4 x 4cm heavy-duty counter-rotating fans w/ optimal fan speed control & air shroud | 4 x 4cm heavy-duty counter-rotating fans w/ optimal fan speed control & air shroud | 4 x 4cm heavy-duty counter-rotating fans w/optimal fan speed control & air shroud |
| Form Factor | 1U Rackmount 437 x 43 x 686mm (17.2" x 1.7" x 27") | 1U Rackmount 437 x 43 x 686mm (17.2" x 1.7" x 27") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") |



| SuperServer 6015B-T+V/T+B | SuperServer 6015B-3RV/3RB SuperServer 6015B-3V/3B | SuperServer 6015B-8V/8B | SuperServer 6015B-TV/TB |
|--|--|--|--|
| Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) |
| High-end enterprise server, SQL server, high performance computing cluster (HPCC) | High-end enterprise server, SQL server, high performance computing cluster (HPCC) | High-end enterprise server, SQL server, high performance computing cluster (HPCC) | High-end enterprise server, SQL server, high performance computing cluster (HPCC) |
| <ul style="list-style-type: none"> • 4 SATA drive bays with SGPIO • Universal PCI-X or PCI-Express • 64 GB FB-DIMM memory • 2 Gigabit Ethernet ports • ZCR support • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) • 700W high-efficiency power | <ul style="list-style-type: none"> • 4 SCA drive bays with SAF-TE • Universal PCI-X or PCI-Express • 32 GB FB-DIMM memory • 2 Gigabit Ethernet ports • ZCR support • SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) • 560W high-efficiency power | <ul style="list-style-type: none"> • 4 SATA drive bays with SGPIO • Universal PCI-X or PCI-Express • 32 GB FB-DIMM memory • 2 Gigabit Ethernet ports • SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) • 560W high-efficiency power supply | <ul style="list-style-type: none"> • 4 SATA drive bays with SGPIO • Universal PCI-X or PCI-Express • 32 GB FB-DIMM memory • 2 Gigabit Ethernet ports • SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) • 560W high-efficiency power supply |
| Intel® 5000P chipset with 1.33GHz FSB/SUPER® X7DBR-i+ | Intel® 5000P chipset with 1.33GHz FSB/SUPER® X7DBR-3 | Intel® 5000P chipset with 1.33GHz FSB/SUPER® X7DBR-8 | Intel® 5000P chipset with 1.33GHz FSB/SUPER® X7DBR-E |
| 64 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 16 DIMM sockets | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets |
| 1 Universal PCI-X 133 MHz (full-length)/PCI-Express x8 (full-length) | 1 Universal PCI-X 133 MHz (full-length)/PCI-E x8 (full-length) 1 Universal PCI-X 133 MHz (low-profile)/PCI-E x8 (low-profile) | 1 Universal PCI-X 100 MHz (full-length)/PCI-E x8 (full-length) 1 Universal PCI-X 100 MHz (low-profile)/PCI-E x8 (low-profile) | 1 Universal PCI-X 133 MHz (full-length)/PCI-E x8 (full-length) 1 Universal PCI-X 133 MHz (low-profile)/PCI-E x8 (low-profile) |
| Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Adaptec® 9410 for 4 Int. SAS/SATA ports and 1 Ext. 4x port; optional AOC-LPZCR3 (RAID 5) Intel® ESB2 for 6 SATA (3Gbps); RAID 0, 1, 5, 10 | Adaptec® 7902W 2-channel Ultra320 SCSI Optional AOC-LPZCR3 (RAID 5) Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 |
| Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller |
| SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| 4 x 3.5" hot-swap Ultra320 SCA drive bays with SAF-TE | 4 x 3.5" hot-swap SAS/SATA drive bays with SES2 | 4 x 3.5" hot-swap Ultra320 SCA drive bays with SAF-TE | 4 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) |
| 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive |
| 700W high-efficiency power supply w/I ² C | 6015B-3R (V/B): Redundant high-efficiency 650W power supply w/I ² C 6015B-3 (V/B): 560W Silver Level high-efficiency power supply I ² C | 560W high-efficiency power supply | 560W high-efficiency power supply |
| 4 x 4cm heavy-duty counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm heavy-duty counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm heavy-duty counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm heavy-duty counter-rotating fans w/optimal fan speed control & air shroud |
| 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") |



**QPI & DDR3
SAS RAID 5**



QPI & DDR3



SAS RAID 5



| MODEL | SuperServer 1026T-M3 | SuperServer 1026T-T | SuperServer 1025C-3B |
|-----------------------------|--|--|--|
| Processor Support | Quad-Core/Dual-Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual-Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) |
| Key Applications | File server, e-mail server, web server for small business & other server applications | File server, e-mail server, web server for small business & other server applications | File server, e-mail server, web server for small business & other server applications |
| Outstanding Features | <ul style="list-style-type: none"> • 20" depth compact size • Eight 2.5" SAS/SATA drive bays • 48GB DDR3 SDRAM • 560W high efficiency Silver Level power | <ul style="list-style-type: none"> • 1 Full-height & full-length PCI-E card • 4 2.5" SATA drive bays • 48GB DDR3 SDRAM • 560W high efficiency Silver Level power | <ul style="list-style-type: none"> • 85%+ Power Efficiency (20%~100% Loading) • 40% Less Power Consumption • 130 to 150% Greater System Performance • Up to 4 x 2.5" SAS or SATA HDD |
| Chipset/ Serverboard | Intel® 5500 chipset with QPI up to 6.4GT/s SUPER [®] X8DTL-3 | Intel® 5500 chipset with QPI up to 6.4GT/s SUPER [®] X8DTL-i | Intel® 5100 chipset with 1.33GHz FSB/ SUPER [®] X7DCL-3 |
| System Memory (Max.) | 48GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 6 DIMMs | 48GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 6 DIMMs | 32/48 GB* Dual-Channel ECC Reg. DDRII 667/533MHz in 6 DIMM sockets |
| Expansion Slots | 1 PCI-E 2.0 x8 (in x16 slot) | 1 PCI-E 2.0 x8 (in x16 slot) | 1 PCI-E x8 |
| Onboard SATA RAID | LSI® LSI 1068E 8-port SAS controller Optional AOC-iButton68 (RAID 5) Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | LSI® 1068E for 8 SAS/SATA ports Optional AOC-iButton68 (RAID 5) Intel® ICH9R for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 |
| Onboard LAN/VGA | Dual LAN with Intel® 82574L Gigabit Ethernet controller (w/IOAT support) Matrox G200eW graphics | Dual LAN with Intel® 82574L Gigabit Ethernet controller (w/IOAT support) Matrox G200eW graphics | Dual LAN with Intel® 82573 Gigabit Ethernet controllers XGI Z9s 32MB graphics controller |
| Manageability | Super Doctor® III, Watch Dog | Super Doctor® III, Watch Dog | SIMLC socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| Drive Bays | 8 x 2.5" hot-swap drive bays | 4 x 2.5" hot-swap drive bays | 4 x 2.5" hot-swap SAS drive bays with SES2 |
| Peripheral Bays | N/A | N/A | N/A |
| Power Supply | 560W high-efficiency Silver Level power supply w/FC | 560W high-efficiency Silver Level power supply w/FC | 560W Silver Level high-efficiency power supply w/FC |
| Cooling System | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 3 x 4cm counter-rotating fans & optional 2 x 4cm fans for add-on card area | 3 x 4cm counter-rotating fans & optional 2 x 4cm fans for add-on card area |
| Form Factor | 1U Rackmount 437 x 43 x 508mm (17.2" x 1.7" x 20") | 1U Rackmount 426 x 43 x 558mm (16.8" x 1.7" x 21.95") | 1U Rackmount 426 x 43 x 558mm (16.8" x 1.7" x 21.95") |



SAS RAID 5

QPI & DDR3

QPI & DDR3

QPI & DDR3



| SuperServer 1025C-M3B | SuperServer 6016T-MT | SuperServer 6016T-T | SuperServer 6016T-MR |
|--|--|---|---|
| Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual-Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual-Core Intel® Xeon® processor 5500 series (LGA1366) |
| File server, e-mail server, web server for small business & other server applications | File server, e-mail server, web server for small business & other server applications | File server, e-mail server, web server for small business & other server applications | File server, e-mail server, web server for small business & other server applications |
| <ul style="list-style-type: none"> • 85%+ Power Efficiency(20%~100% Loading) • 40% Less Power Consumption • 130~150% Greater System Performance • Up to 8 2.5" SAS or SATA HDD | <ul style="list-style-type: none"> • Four 3.5" SAS/SATA drive bays • 48GB DDR3 SDRAM • 520W high-efficiency power | <ul style="list-style-type: none"> • Two 3.5" SAS/SATA drive bays • 48GB DDR3 SDRAM • 280W high-efficiency power | <ul style="list-style-type: none"> • 14.5" depth optimized for space efficiency • 48GB DDR3 SDRAM • 280W high-efficiency power |
| Intel® 5100 chipset with 1.33GHz FSB/SUPER●® X7DCL-3 | Intel® 5500 chipset with QPI up to 6.4GT/s SUPER●® X8DTL-i | Intel® 5500 chipset with QPI up to 6.4GT/s SUPER●® X8DTL-i | Intel® 5500 chipset with QPI up to 6.4GT/s SUPER●® X8DTL-i |
| 32/48 GB* Dual-Channel ECC Reg. DDRII 667/533MHz in 6 DIMM sockets | 48GB of Reg. ECC DDRIII 1333/1066/800 MHz SDRAM in 6 DIMMs | 48GB of Reg. ECC DDRIII 1333/1066/800 MHz SDRAM in 6 DIMMs | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets |
| 1 PCI-E x8 | 1 PCI-E 2.0 x8 (in x16 slot) | 1 PCI-E 2.0 x8 (in x16 slot) | 1 PCI-E 2.0 x8 (in x16 slot) |
| LSI® 1068E for 8 SAS/SATA ports Optional AOC-iButton68 (RAID 5) Intel® ICH9R for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) |
| Dual LAN with Intel® 82573 Gigabit Ethernet controllers XGI Z9s 32MB graphics controller | Dual LAN with Intel® 82574L Gigabit Ethernet cotroller (w/IOAT support) Matrox G200eW graphics | Dual LAN with Intel® 82574L Gigabit Ethernet cotroller (w/IOAT support) Matrox G200eW graphics | Dual LAN with Intel® 82574L Gigabit Ethernet cotroller (w/IOAT support) Matrox G200eW graphics |
| SIMLC socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | Super Doctor® III, Watch Dog | Super Doctor® III, Watch Dog | Super Doctor® III, Watch Dog |
| 8 x 2.5" hot-swap SAS drive bays with SES2 | 4 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) | 2 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) | 1 x 3.5" fixed SATA drive bays |
| 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive |
| 560W Silver Level high-efficiency power supply w/FC | 520W high-efficiency power supply | 280W high-efficiency power supply | 280W high-efficiency power supply |
| 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 4 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 2 x 10cm high performance blowers w/optimal fan speed control & air shroud | 3 x 4cm heavy-duty counter-rotating fans w/optimal fan speed control & air shroud |
| 1U Rackmount 437 x 43 x 508mm (17.2" x 1.7" x 20") | 1U Rackmount 437 x 43 x 503mm (17.2" x 1.7" x 19.8") | 1U Rackmount 426 x 44 x 574mm (16.8" x 1.7" x 22.6") | Mini 1U Rackmount 426 x 44 x 369mm (16.8" x 1.7" x 14.5") |

*Low Power Consumption
w/4 SATA*



| MODEL | SuperServer 6015C-M3/M3B SuperServer 6015C-MT/MTB | SuperServer 6015V-MT/MTB | SuperServer 6015V-T/TB |
|-----------------------------|---|---|--|
| Processor Support | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 Series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 Series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 Series (LGA771) |
| Key Applications | File server, e-mail server, web server for small business & other server applications | File server, e-mail server, web server for small business & other server applications | File server, e-mail server, web server for small business & other server applications |
| Outstanding Features | <ul style="list-style-type: none"> • 4 SATA drive bays with SGPIO • PCI-Express x8 • 32/48 GB ECC reg. DDR2 memory • 2 Gigabit Ethernet ports • SIM1U socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) • 520W high-efficiency power supply | <ul style="list-style-type: none"> • 4 SATA drive bays w/SGPIO • 1 PCI-X 133MHz or 1 PCI-E x8 • 16 GB FB-DIMM memory • 2 Gigabit Ethernet ports • Front-side USB 2.0 ports • SIM1U slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) • 520W high-efficiency power supply | <ul style="list-style-type: none"> • 2 SATA drive bays w/SGPIO • 1 PCI-X 133 MHz • 16 GB FB-DIMM memory • 2 Gigabit Ethernet ports • Front side USB 2.0 ports • SIMLC slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) • 520W high-efficiency power supply |
| Chipset/ Serverboard | Intel® 5100 chipset with 1.33GHz FSB/SUPER® X7DCL-i/X7DCL-3 | Intel® 5000V chipset with 1.33GHz FSB/SUPER® X7DVL-i | Intel® 5000V chipset with 1.33GHz FSB/SUPER® X7DVL-E |
| System Memory (Max.) | 32/48 GB Dual-Channel ECC Reg. DDRII 667/533 in 6 DIMM sockets | 16 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 6 DIMM sockets | 16 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 6 DIMM sockets |
| Expansion Slots | 1 PCI-Express x8 | 1 Universal 64-bit PCI-X 133MHz or PCI-E x8 | 1 64-bit PCI-X 133 MHz |
| Onboard SATA RAID | LSI® 1068E for 8 SAS/SATA ports Optional AOC-iButton68 (RAID 5) RAID 0,1,10 Intel® ICH9R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 | Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 |
| Onboard LAN/VGA | Dual LAN with Intel® 82573 PCI-Express Gigabit Ethernet controllers XGI Z9s 32MB graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller XGI Z7 16MB graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller |
| Manageability | SIMLC socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIM1U slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III Watch Dog | SIMLC slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| Drive Bays | 6015C-M3: 4 x 3.5" hot-swap SAS drive bays w/SES2 6015C-MT: 4 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) | 4 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) | 2 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) |
| Peripheral Bays | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive |
| Power Supply | 520W high-efficiency power supply | 520W high-efficiency power supply | 520W high-efficiency power supply |
| Cooling System | 4 x 4cm heavy duty fans w/optimal fan speed control & air shroud | 4 x 4cm heavy-duty fans w/optimal fan speed control & air shroud | 2 x 10cm high performance blowers w/optimal fan speed control & air shroud |
| Form Factor | 1U Rackmount 437 x 43 x 503mm (17.2" x 1.7" x 19.8") | 1U Rackmount 437 x 43 x 503mm (17.2" x 1.7" x 19.8") | 1U Rackmount 426 x 44 x 574mm (16.8" x 1.7" x 22.6") |

Low Power System

Six-Core Xeon MP



| SuperServer 6015V-TLP/TLPB | SuperServer 6015V-MR/MRB | SuperServer 6015V-MRLP/MRLPB | SuperServer 8015C-TB |
|---|--|--|---|
| Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100/5000 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100/5000 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100/5000 series (LGA771) | Six-Core/Quad-Core Intel® Xeon® MP Processor 7400/7300/7200 series |
| File server, e-mail server, web server for small business & other server applications | File/print server, firewall applications, client nodes, mail server, web server for small business applications | File/print server, firewall applications, client nodes, mail server, web server for small business applications | High-end enterprise server, SQL server, high performance computing cluster (HPCC), high density server farm |
| <ul style="list-style-type: none"> • 2 SATA drive bays w/SGPIO • 1 PCI-X 133MHz • 16 GB FB-DIMM memory • 2 Gigabit Ethernet ports • Front side USB 2.0 ports • SIMLC slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) • 280W high-efficiency power supply | <ul style="list-style-type: none"> • Optimized for shallow racks • 1 PCI-X 133 MHz • 16 GB FB-DIMM memory • 2 Gigabit Ethernet ports • Front side USB 2.0 ports • SIMLC slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) • 520W high-efficiency power supply | <ul style="list-style-type: none"> • Optimized for shallow racks • 1 PCI-X 133 MHz • 16 GB FB-DIMM memory • 2 Gigabit Ethernet ports • SIMLC slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) • 280W high-efficiency power supply | <ul style="list-style-type: none"> • 16 processing cores in 1U • 3 SATA drive bays • PCI-Express x8 • 192 GB FB-DIMM 667/533 SDRAM • 2 Gigabit Ethernet ports • IPMI 2.0 server management • 1000W high-efficiency power |
| Intel® 5000V chipset with 1.33GHz FSB/SUPER® X7DVL-i | Intel® 5000V chipset with 1.33GHz FSB/SUPER® X7DVL-E | Intel® 5000V chipset with 1.33GHz FSB/SUPER® X7DVL-E | Intel® 7300 chipset with 1.06GHz FSB/SUPER® X7QCE |
| 16 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 6 DIMM sockets | 16 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 6 DIMM sockets | 16 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 6 DIMM sockets | 192 GB Fully-buffered DIMM (FBD) DDRII 667/533 in 24 DIMM sockets |
| 1 Universal 64-bit PCI-X 133MHz or 1 PCI-E x8 | 1 64-bit PCI-X 133 MHz | 1 64-bit PCI-X 133 MHz | 1 PCI-E x8 (using x16 slot) |
| Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Intel ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Intel® ESB2 for 6 SATA; RAID 0, 1, 5, 10 |
| Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82575EB Gigabit Ethernet controller ATI® ES1000 32MB PCI graphics controller |
| SIMLC slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMLC slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMLC slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| 2 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) | 1 x 3.5" fixed SATA drive bay with enclosure management (SGPIO) | 2 x 3.5" fixed SATA drive bays with enclosure management (SGPIO) | 3 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) |
| 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive |
| 280W high-efficiency power supply | 520W high-efficiency power supply | 280W high-efficiency power supply | 1000W high-efficiency power supply w/ FC |
| 2 x 10cm high performance blowers w/optimal fan speed control & air shroud | 3 x 4cm heavy-duty counter-rotating fans w/optimal fan speed control & air shroud | 2 x 4cm heavy-duty counter-rotating fans w/optimal fan speed control & air shroud | 6 x 4cm heavy-duty counter-rotating fans w/optimal fan speed control & air shroud |
| 1U Rackmount 426 x 44 x 574mm (16.8" x 1.7" x 22.6") | Mini 1U Rackmount 437 x 44 x 369mm (17.2" x 1.7" x 14.5") | Mini 1U Rackmount 437 x 44 x 369mm (17.2" x 1.7" x 14.5") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.75") |



**QPI & DDR3
IPMI 2.0 onboard**




| MODEL | SuperServer 1015B-3 | SuperServer 1015B-M3 | SuperServer 1016T-MTF |
|-----------------------------|--|---|---|
| Processor Support | Single Intel® Quad-Core/Dual-Core Xeon® 3000 Sequence, Core 2 Extreme/Quad/Duo (LGA 775 socket) | Single Intel® Quad-Core/Dual-Core Xeon® 3000 Sequence, Core 2 Extreme/Quad/Duo (LGA 775 socket) | Single Intel® Quad-Core/Dual-Core Core™ i7 & Xeon® 5500/3500 Series (LGA 1366 socket) |
| Key Applications | NAS storage, file server, mail server, web server for small businesses & other server applications | NAS storage, file server, mail server, web server for small businesses & other server applications | NAS storage, file server, mail server, web server for small business, cluster node & other server applications |
| Outstanding Features | <ul style="list-style-type: none"> • The World's First 1U Silver Level • Power Supply • 4 2.5" hot-swap drive bays • 8 GB DDRII 800/667 SDRAM • 2 Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID | <ul style="list-style-type: none"> • The World's First 1U Silver Level Power Supply • 4 2.5" hot-swap drive bays • 8 GB DDRII 800/667 SDRAM • 2 Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID | <ul style="list-style-type: none"> • 4 SATA drive bays • 24 GB DDRIII 1333/1066/800 SDRAM • Dual Gigabit Ethernet ports • Front USB 2.0 & serial ports • IPMI 2.0 with dedicated LAN |
| Chipset/ Serverboard | Intel® 3210 chipset with 1.6GHz FSB SUPER® X7SB3-F | Intel® 3210 chipset with 1.6GHz FSB SUPER® X7SB3-F | Intel® X58 chipset with QPI up to 6.4 GT/s SUPER® X8STi-F |
| System Memory (Max.) | 8 GB of Unb. ECC, non ECC DDRII 800/667 SDRAM in 4 DIMM sockets | 8 GB of Unb. ECC, non ECC DDRII 800/667 SDRAM in 4 DIMM sockets | 24 GB of Unb. ECC, or non ECC DDRIII 1333/1066/800 SDRAM in 6 DIMM sockets |
| Expansion Slots | 1 PCI-E x8 | 1 PCI-E x8 | 1 PCI-E 2.0 x16 |
| Onboard SATA RAID | LSI® 1068E controller for 8 SAS Optional AOC-iButton68 (RAID 5) RAID 0,1,10 Intel® ICH9 for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 Optional UIO SAS controller card | LSI® 1068E for 8 SAS/SATA ports Optional AOC-iButton68 (RAID 5) RAID 0,1,10 Intel® ICH9R for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Intel® ICH10R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) |
| Onboard LAN/VGA | Dual LAN with Intel® 82573L PCI-E Gigabit Ethernet controller Integrated 128MB server graphics | Dual LAN with Intel® 82573L PCI-E Gigabit Ethernet controller Integrated 128MB server graphics | Dual LAN with Intel® 82574L Gigabit Ethernet controllers Integrated 128MB server graphics |
| Manageability | IPMI 2.0 + KVM with dedicated LAN Super Doctor® III, Watch Dog | IPMI 2.0 + KVM with dedicated LAN Super Doctor® III, Watch Dog | IPMI 2.0 with dedicated LAN Super Doctor® III, Watch Dog |
| Drive Bays | 4 x 2.5" hot-swap SATA drive bay | 8 x 2.5" hot-swap SAS drive bays with SES2 | 4 x 3.5" hot-swap SATA drive bays |
| Peripheral Bays | 1 slim CD-ROM drive option | 1 slim CD-ROM drive option | 1 slim DVD-ROM drive |
| Power Supply | 560W Silver Level high-efficiency power supply w/I ² C | 560W Silver Level high-efficiency power supply w/I ² C | 280W high-efficiency power supply |
| Cooling System | 3 x 4cm counter-rotating fans & optional 2 x 4cm fans for add-on card area | 4 x 4cm counter-rotating fans & optional 2 x 4cm fans for add-on card area | 4 x 4cm heavy-duty fans w/optimal fan speed control & air shroud |
| Form Factor | 1U Rackmount 426 x 43 x 558mm (16.8" x 1.7" x 21.95") | 1U Rackmount 437 x 43 x 508mm (17.2" x 1.7" x 20") | 1U Rackmount 437 x 43 x 503mm (17.2" x 1.7" x 19.8") |

QPI & DDR3



QPI & DDR3

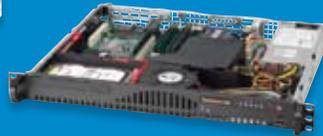

**1U Twin™
1.6 GHz FSB
10 Gigabit Ethernet**



**1U Twin™
1.6 GHz FSB**



| SuperServer 5016T-T | SuperServer 5016T-MR | SuperServer 5015TB-10GB | SuperServer 5015TB-TB |
|---|--|---|---|
| Single Intel® Quad-Core/Dual-Core Core™ i7 & Xeon® 5500/3500 Series (LGA 1366 socket) | Single Intel® Quad-Core/Dual-Core Core™ i7 & Xeon® 5500/3500 Series (LGA 1366 socket) | Single Intel® Quad-Core/Dual-Core Xeon® 3000 Sequence, Core 2 Extreme/Quad/Duo (LGA 775 socket) | Single Intel® Quad-Core/Dual-Core Xeon® 3000 Sequence, Core 2 Extreme/Quad/Duo (LGA 775 socket) |
| NAS storage, file server, mail server, web server for small business, cluster node & other server applications | NAS storage, file server, mail server, web server for small business, cluster node & other server applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications |
| <ul style="list-style-type: none"> • 4 SATA drive bays • 24 GB DDRIII 1333/1066/800 SDRAM • Dual Gigabit Ethernet ports • Front USB 2.0 & serial ports • IPMI 2.0 with dedicated LAN | <ul style="list-style-type: none"> • Optimized for shallow racks • 24 GB DDRIII 1333/1066/800 SDRAM • 2 PCI-Express x16 (Gen 2.0) • 4 Gigabit Ethernet ports • PWM fan speed control • High-efficiency power | <ul style="list-style-type: none"> • Two nodes in 1U • Up to 8 Cores in 1U • 10 Gigabit Ethernet controller onboard • Double density and computing power • Independent power control • Independent cooling control • Higher power utilization increases power supply efficiency • Reduce power cables and power strips • Save maintenance/management costs | <ul style="list-style-type: none"> • Two nodes in 1U • Up to 8 Cores in 1U • Double density and computing power • Independent power control • Independent cooling control • Higher power utilization increases power supply efficiency • Reduce power cables and power strips • Save maintenance/management costs |
| Intel® X58 chipset with QPI up to 6.4 GT/s SUPER● X8STi-F | Intel® X58 chipset with QPI up to 6.4 GT/s SUPER● X8STi | Intel® X48 chipset with 1.6GHz FSB/SUPER● X7SBT-10G | Intel® X48 chipset with 1.6GHz FSB/SUPER● X7SBT-10G |
| 24 GB of Unb. ECC, or non ECC DDRIII 1333/1066/800 SDRAM in 6 DIMM sockets | 24 GB of Unb. ECC, non ECC DDRIII 1333/1066/800 SDRAM in 6 DIMM sockets | 8 GB of Unb. ECC, non ECC DDRIII 1333/1066/800 SDRAM; up to non-ECC 1600 MHz in 4 DIMM sockets | 8 GB of Unb. ECC, non ECC DDRIII 1333/1066/800 SDRAM; up to non-ECC 1600 MHz in 4 DIMM sockets |
| 1 PCI-E 2.0 x16 | 1 PCI-E 2.0 x16 | Twin set of PCI-E x16 via riser card | Twin set of PCI-E x16 via riser card |
| Intel® ICH10R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH10R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Twin set of Intel® ICH9R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 | Twin set of Intel® ICH9R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 |
| Dual LAN with Intel® 82574L Gigabit Ethernet controllers Integrated 128MB server graphics | Dual LAN with Intel® 82574L Gigabit Ethernet controllers Integrated 120MB server graphics | Twin set of Dual LAN with Intel® 82598EB 10Gigabit & 82573V + 82573L Ethernet controllers Twin set of ATI® ES1000 32MB PCI graphics | Twin set of Dual LAN with Intel® 82573V + 82573L Ethernet controllers Twin set of ATI® ES1000 32MB PCI graphics |
| IPMI 2.0 with dedicated LAN Super Doctor® III, Watch Dog | SuperDoctor® III, Watch Dog | Twin set of SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog | Twin set of SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN), Super Doctor® III, Watch Dog |
| 2 x 3.5" hot-swap SATA drive bays | 1 x 3.5" fixed SATA drive bay | Twin set of 2 x 3.5" hot-swap drive bays | Twin set of 2 x 3.5" hot-swap drive bays |
| 1 slim DVD-ROM drive | 1 slim CD-ROM drive option | N/A | N/A |
| 280W high-efficiency power supply | 200W high-efficiency power supply | 780W high-efficiency power supply w/ iFC | 780W high-efficiency power supply w/ iFC |
| 4 x 4cm heavy-duty fans w/optimal fan speed control & air shroud | 1 x 10cm heavy-duty blower w/optimal PWM fan speed control & air shroud | Twin set of 3 x 4cm counter-rotating PWM fans w/optimal fan speed control & air shroud | Twin set of 3 x 4cm counter-rotating PWM fans w/optimal fan speed control & air shroud |
| 1U Rackmount 437 x 43 x 503mm (17.2" x 1.7" x 19.8") | Mini 1U Rackmount 426 x 43 x 356mm (16.8" x 1.7" x 14") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.5") | 1U Rackmount 437 x 43 x 705mm (17.2" x 1.7" x 27.5") |



| MODEL | SuperServer 5015B-URV/URB | SuperServer 5015B-UV/UB | SuperServer 5015B-NTR/NT(V) SuperServer 5015B-NTR/NT(B) |
|-----------------------------|--|--|--|
| Processor Support | Single Intel® Quad-Core/Dual-Core Xeon® 3000 Sequence, Core 2 Extreme/Quad/Duo (LGA 775 socket) | Single Intel® Quad-Core/Dual-Core Xeon® 3000 Sequence, Core 2 Extreme/Quad/Duo (LGA 775 socket) | Single Intel® Quad-Core/Dual-Core Xeon® 3000 Sequence, Core 2 Extreme/Quad/Duo (LGA 775 socket) |
| Key Applications | NAS storage, file server, mail server, web server for small businesses & other server applications | NAS storage, file server, mail server, web server for small businesses & other server applications | NAS storage, file server, mail server, web server for small businesses & other server applications |
| Outstanding Features | <ul style="list-style-type: none"> • Universal I/O (UIO) slot • 4 hot-swap drive bays • 8 GB DDRIII 1600 (XMP) SDRAM • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID | <ul style="list-style-type: none"> • Universal I/O (UIO) slot • 4 hot-swap drive bays • 8 GB DDRIII 1600 (XMP) SDRAM • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID | <ul style="list-style-type: none"> • The World's First 1U Silver Level Power Supply • Universal I/O (UIO) slot • 8 GB DDRIII 1600 (XMP) SDRAM • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID |
| Chipset/ Serverboard | Intel® X48 chipset with 1.6GHz FSB/SUPER® X7SBU | Intel® X48 chipset with 1.6GHz FSB/SUPER® X7SBU | Intel® X48 chipset with 1.6GHz FSB/SUPER® X7SBU |
| System Memory (Max.) | 8 GB of Unb., non ECC DDRIII 1333/1066/800 SDRAM; up to non-ECC 1600 MHz in 4 DIMM sockets | 8 GB of Unb., non ECC DDRIII 1333/1066/800 SDRAM; up to non-ECC 1600 MHz in 4 DIMM sockets | 8 GB of Unb., non ECC DDRIII 1333/1066/800 SDRAM; up to non-ECC 1600 MHz in 4 DIMM sockets |
| Expansion Slots | Right slot: 1 PCI-E x4 (in x8 slot) Left slot: 1 Universal I/O (UIO) slot via riser card 1 PCI-E x8 | Right slot: 1 PCI-E x4 (in x8 slot) Left slot: 1 Universal I/O (UIO) slot via riser card 1 PCI-E x8 | Right slot: 1 PCI-E x4 (in x8 slot) Left slot: 2 PCI-E x8 |
| Onboard SATA RAID | Intel® ICH9R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 Optional UIO SAS controller card | Intel® ICH9R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 Optional UIO SAS controller card | Intel® ICH9R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 |
| Onboard LAN/VGA | Dual LAN with Intel® 82573V/L PCI-E Gigabit Ethernet controllers ATI® ES1000 32MB PCI graphics controller | Dual LAN with Intel® 82573V/L PCI-E Gigabit Ethernet controllers ATI® ES1000 32MB PCI graphics controller | Dual LAN with Intel® 82573V/L PCI-E Gigabit Ethernet controllers ATI® ES1000 32MB PCI graphics controller |
| Manageability | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| Drive Bays | 4 x 3.5" hot-swap drive bays | 4 x 3.5" hot-swap drive bays | 4 x 3.5" hot-swap drive bays |
| Peripheral Bays | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive |
| Power Supply | 450W Redundant high-efficiency power supply w/FC | 560W high-efficiency power supply | 5015B-NTR(B): 450W Redundant high-efficiency power supply w/FC 5015B-NT(B): 560W high-efficiency power supply |
| Cooling System | 3 x 4cm counter-rotating fans with optimal fan speed control & air shroud | 3 x 4cm counter-rotating fans with optimal fan speed control & air shroud | 5015B-NTR(V/B): 3 x 4cm counter-rotating fans 5015B-NT (V/B): 4 x 4cm counter-rotating fans with optimal fan speed control & air shroud |
| Form Factor | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") |



| SuperServer 5015B-MT/MTB | SuperServer 5015B-T/TB | SuperServer 5015B-MR/MRB | SuperServer 5015B-MF/MFB |
|--|--|--|---|
| Single Intel® Quad-Core/Dual-Core Xeon® 3000 Sequence, Core 2 Quad/Duo series (LGA 775 socket) | Single Intel® Quad-Core/Dual-Core Xeon® 3000 Sequence, Core 2 Quad/Duo series (LGA 775 socket) | Single Intel® Dual-Core Xeon® 3000 Sequence, Core 2 Duo series (LGA 775 socket) | Single Intel® Dual-Core Xeon® 3000 Sequence, Core 2 Duo series (LGA 775 socket) |
| NAS storage, file server, mail server, web server for small business, cluster node & other server applications | NAS storage, file server, mail server, web server for small business, cluster node & other server applications | NAS storage, file server, mail server, web server for small business, cluster node & other server applications | NAS storage, file server, mail server, web server for small business, cluster node & other server applications |
| <ul style="list-style-type: none"> • 4 SATA drive bays • Universal PCI-X or PCI-Express • 8 GB DDRII 800/667 SDRAM • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 socket • Front USB 2.0 & serial ports | <ul style="list-style-type: none"> • 2 SATA drive bays • Universal PCI-X or PCI-Express • 8 GB DDRII 800/667 SDRAM • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 socket | <ul style="list-style-type: none"> • Optimized for shallow racks • Universal PCI-X or PCI-Express • 8 GB DDRII 800/667 SDRAM • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 socket • PWM fan speed control • High-efficiency power | <ul style="list-style-type: none"> • Optimized for shallow racks • Universal PCI-X or PCI-Express • 8 GB DDRII 800/667 SDRAM • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 socket • Front-side I/O Access |
| Intel® 3210 chipset with 1.33GHz FSB/SUPER● X7SBI | Intel® 3210 chipset with 1.33GHz FSB/SUPER● X7SBI | Intel® 3210 chipset with 1.33GHz FSB/SUPER● X7SBI | Intel® 3210 chipset with 1.33GHz FSB/SUPER● X7SBI |
| 8 GB Dual-channel Unb. ECC, non ECC DDRII 800/667 SDRAM in 4 DIMM sockets | 8 GB Dual-channel Unb. ECC, non ECC DDRII 800/667 SDRAM in 4 DIMM sockets | 8 GB Dual-channel Unb. ECC, non ECC DDRII 800/667 SDRAM in 4 DIMM sockets | 8 GB Dual-channel Unb. ECC, non ECC DDRII 800/667 SDRAM in 4 DIMM sockets |
| 1 Universal PCI-X 133MHz (full-height & half-length) or 1 PCI-E x8 | 1 Universal PCI-X 133MHz (full-height & half-length) or 1 PCI-E x8 | 1 Universal PCI-X 133MHz (full-height & half-length) or 1 PCI-E x8 | 1 Universal PCI-X 133MHz (full-height & half-length) or 1 PCI-E x8 |
| Intel® ICH9R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 | Intel® ICH9R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 | Intel® ICH9R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 | Intel® ICH9R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 |
| Dual LAN with Intel® 82573 PCI-Express Gigabit Ethernet controllers ATI® ES1000 32MB PCI graphics controller | Dual LAN with Intel® 82573 PCI-Express Gigabit Ethernet controllers ATI® ES1000 32MB PCI graphics controller | Dual LAN with Intel® 82573 PCI-Express Gigabit Ethernet controllers ATI® ES1000 32MB PCI graphics controller | Dual LAN with Intel® 82573 PCI-Express Gigabit Ethernet controllers ATI® ES1000 32MB PCI graphics controller |
| SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| 4 x 3.5" hot-swap SATA drive bays | 2 x 3.5" hot-swap SATA drive bays | 1 x 3.5" fixed SATA drive bay | 1 x 3.5" fixed or 2 x 2.5" optional fixed SATA drive bays |
| 1 slim DVD-ROM drive | 1 slim DVD-ROM drive 1 floppy drive | 1 slim CD-ROM drive option | N/A |
| 300W high-efficiency power supply | 260W power supply | 200W high-efficiency power supply | 260W power supply |
| 4 x 4cm heavy-duty fans w/optimal fan speed control & air shroud | 2 x 10cm heavy-duty blowers w/optimal fan speed control & air shroud | 1 x 10cm heavy-duty blower w/optimal PWM fan speed control & air shroud | 1 x 10cm heavy-duty blower w/optimal fan speed control & air shroud |
| 1U Rackmount 437 x 43 x 503mm (17.2" x 1.7" x 19.8") | 1U Rackmount 426 x 43 x 574mm (16.8" x 1.7" x 22.6") | Mini 1U Rackmount 426 x 43 x 356mm (16.8" x 1.7" x 14") | Mini 1U Rackmount 426 x 43 x 356mm (16.8" x 1.7" x 14") |



| MODEL | SuperServer 5015M-URV/UV SuperServer 5015M-URB/UB | SuperServer 5015M-NTRV/NTV SuperServer 5015M-NTRB/NTB | SuperServer 5015M-Ni/NiB |
|-----------------------------|--|---|--|
| Processor Support | Single Intel® Quad-Core/Dual-core Xeon® 3000 Sequence, Core 2 series (LGA 775 socket) | Single Intel® Quad-Core/Dual-core Xeon® 3000 Sequence & Core 2 series (LGA 775 socket) | Single Intel® Quad-Core/Dual-core Xeon® 3000 Sequence & Core 2 series |
| Key Applications | NAS storage, file server, mail server, web server for small businesses & other server applications | NAS storage, file server, mail server, web server for small businesses & other server applications | High-end file/print server, web server, communication gateway, primary server for small businesses |
| Outstanding Features | <ul style="list-style-type: none"> • Universal I/O (UIO) slot • 4 hot-swap drive bays • 8 GB DDRII 667 SDRAM • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID | <ul style="list-style-type: none"> • Supports up to 3 add-on cards • 4 hot-swap drive bays • 8 GB DDRII 667 SDRAM • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID | <ul style="list-style-type: none"> • Supports up to 3 add-on cards • 3 fixed drive bays • 8 GB DDRII 667 SDRAM • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • UID |
| Chipset/ Serverboard | Intel® 3010 chipset with 1.06GHz FSB/SUPER® PDSMU | Intel® 3010 chipset with 1.06GHz FSB/SUPER® PDSMU | Intel® 3010 chipset with 1.06GHz FSB/SUPER® PDSMU |
| System Memory (Max.) | 8 GB Dual-Channel Unb. ECC, non ECC DDRII 667 SDRAM in 4 DIMM sockets | 8 GB Dual-Channel Unb. ECC, non ECC DDRII 667 SDRAM in 4 DIMM sockets | 8 GB Dual-Channel Unb. ECC, non ECC DDRII 667 SDRAM in 4 DIMM sockets |
| Expansion Slots | Right slot: 1 PCI-E x4 (in x8 slot) Left slot: 1 Universal I/O (UIO) slot via riser card 1 PCI-E x8 | Right slot: 1 PCI-E x4 (in x8 slot) Left slot: 2 PCI-E x8 | Right slot: 1 PCI-E x4 (in x8 slot) Left slot: 2 PCI-E x8 |
| Onboard SATA RAID | Intel® ICH7R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 Optional UIO SAS controller card | Intel® ICH7R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 | Intel ICH7R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 |
| Onboard LAN/VGA | Dual LAN with Intel® 82573 PCI-Express Gigabit Ethernet controllers ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82573 PCI-Express Gigabit Ethernet controllers ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel 82573 PCI-Express Gigabit Ethernet controllers ATI® ES1000 16MB PCI graphics controller |
| Manageability | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| Drive Bays | 4 x 3.5" hot-swap drive bays | 4 x 3.5" hot-swap drive bays | 3 x 3.5" internal drive bays |
| Peripheral Bays | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | N/A |
| Power Supply | 5015M-URV/URB: 450W Redundant high-efficiency power supply w/FC 5015M-UV/UB: 560W high-efficiency power supply | 5015M-NTRV/NTRB: 450W Redundant high-efficiency power supply w/FC 5015M-NTV/NTB: 560W high-efficiency power supply | 280W high-efficiency power supply |
| Cooling System | 5015M-URV/URB: 3 x 4cm counter-rotating fans 5015M-UV/UB: 4 x 4cm counter-rotating fans with optimal fan speed control & air shroud | 5015M-NTRV/NTRB: 3 x 4cm counter-rotating fans 5015M-NTV/NTB: 4 x 4cm counter-rotating fans with optimal fan speed control & air shroud | 2 x 10cm heavy-duty blowers |
| Form Factor | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 437 x 43 x 650mm (17.2" x 1.7" x 25.6") | 1U Rackmount 426 x 43 x 650mm (16.8" x 1.7" x 25.6") |



| SuperServer 5015M-MT+/MT+B | SuperServer 5015M-T+/T+B | SuperServer 5015M-MR+/MR+B | SuperServer 5015M-MF+/MF+B |
|--|--|--|---|
| Single Intel® Quad-Core/Dual-core Xeon® 3000 Sequence & Core 2 series | Single Intel® Quad-Core/Dual-core Xeon® 3000 Sequence & Core 2 series | Single Intel® Quad-Core/Dual-core Xeon® 3000 Sequence & Core 2 series | *Single Intel® Quad-Core/Dual-core Xeon® 3000 Sequence & Core 2 series |
| NAS storage, file server, mail server, web server for small businesses & other server applications | NAS storage, file server, mail server, web server for small businesses & other server applications | File/print server, firewall applications, client nodes, mail server, web server for small business applications | File/print server, firewall applications, client nodes, mail server, web server for small business applications |
| <ul style="list-style-type: none"> • 4 SATA drive bays • Universal PCI-X or PCI-Express • 8 GB DDRII 667 SDRAM • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 socket • Front USB 2.0 & serial ports | <ul style="list-style-type: none"> • 2 SATA drive bays • Universal PCI-X or PCI-Express • 8 GB DDRII 667 SDRAM • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 socket | <ul style="list-style-type: none"> • Optimized for shallow racks • Universal PCI-X or PCI-Express • 8 GB DDRII 667 SDRAM • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 socket | <ul style="list-style-type: none"> • Optimized for shallow racks • Universal PCI-X or PCI-Express • 8 GB DDRII 667 SDRAM • 2 PCI-Express Gigabit Ethernet ports • IPMI 2.0 socket • Front-side I/O Access |
| Intel® 3000 chipset with 1.06GHz FSB/SUPER ● PDSMi+ | Intel® 3000 chipset with 1.06GHz FSB/SUPER ● PDSMi+ | Intel® 3000 chipset with 1.06GHz FSB/SUPER ● PDSMi+ | Intel® 3000 chipset with 1.06GHz FSB/SUPER ● PDSMi+ |
| 8 GB Dual-Channel Unb. ECC, non ECC DDRII 667 SDRAM in 4 DIMM sockets | 8 GB Dual-Channel Unb. ECC, non ECC DDRII 667 SDRAM in 4 DIMM sockets | 8 GB Dual-Channel Unb. ECC, non ECC DDRII 667 SDRAM in 4 DIMM sockets | 8 GB Dual-Channel Unb. ECC, non ECC DDRII 667 SDRAM in 4 DIMM sockets |
| 1 Universal PCI-X 133MHz (full-height & half-length) or 1 PCI-E x8 | 1 Universal PCI-X 133MHz (full-height & full-length) or 1 PCI-E x8 | 1 Universal PCI-X 133MHz (full-length & half-length) or 1 PCI-E x8 | 1 Universal PCI-X 133MHz (full-length & half-length) or 1 PCI-E x8 |
| Intel® ICH7R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 | Intel® ICH7R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 | Intel® ICH7R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 | Intel® ICH7R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 |
| Dual LAN with Intel® 82573 PCI-Express Gigabit Ethernet controllers ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82573 PCI-Express Gigabit Ethernet controllers ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82573 PCI-Express Gigabit Ethernet controllers ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel 82573 PCI-Express Gigabit Ethernet controllers ATI® ES1000 16MB PCI graphics controller |
| IPMI 2.0 socket, SuperDoctor® III, Watch Dog | IPMI 2.0 socket, Super Doctor® III, Watch Dog | IPMI 2.0 socket, Super Doctor® III, Watch Dog | IPMI 2.0 socket, SuperDoctor® III, Watch Dog |
| 4 x 3.5" hot-swap SATA drive bays | 2 x 3.5" hot-swap SATA drive bays | 1 x 3.5" fixed SATA drive bay | 1 x 3.5" fixed or 2 x 2.5" optional fixed SATA drive bays |
| 1 slim CD-ROM drive | 1 slim CD-ROM drive 1 floppy | 1 slim CD-ROM drive | N/A |
| 300W power supply | 300W power supply | 260W power supply | 260W power supply |
| 3 x 4cm heavy-duty fans w/optimal fan speed control & air shroud | 3 x 4cm heavy-duty counter-rotating fans w/optimal fan speed control & air shroud | 2 x 4cm counter-rotating fans w/optimal fan speed control & air shroud | 2 x 4cm counter-rotating fans w/optimal fan speed control & air shroud |
| 1U Rackmount 437 x 44 x 503mm (17.2" x 1.7" x 19.8") | 1U Rackmount 426 x 43 x 574mm (16.8" x 1.7" x 22.6") | Mini 1U Rackmount 426 x 43 x 356mm (16.8" x 1.7" x 14") | Mini 1U Rackmount 426 x 43 x 356mm (16.8" x 1.7" x 14") |



| MODEL | SuperServer 6026TT-BIBQF SuperServer 6026TT-BIBXF | SuperServer 6026TT-BINFF | SuperServer 6026TT-BTF SuperServer 6026TT-BTL |
|-----------------------------------|--|--|---|
| Processor Support | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) |
| Key Applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications |
| Outstanding Features | <ul style="list-style-type: none"> • Best Performance-per-Watt • Four nodes in 2U • Hot-pluggable system • 40/20 Gigabit InfiniBand controller onboard • 1200W Gold Level high-efficiency power supply w/PMBus • 384 GB DDR3 SDRAM • IPMI 2.0 + KVM with dedicated LAN • UID LED | <ul style="list-style-type: none"> • Best Performance-per-Watt • Four nodes in 2U • Hot-pluggable system • InfiniBand controller onboard • 1200W Gold Level high-efficiency power supply w/PMBus • 384 GB DDR3 SDRAM • IPMI 2.0 + KVM with dedicated LAN • UID LED | <ul style="list-style-type: none"> • Best Performance-per-Watt • Four nodes in 2U • Hot-pluggable system • 1200W Gold Level high-efficiency power supply w/PMBus • 384 GB DDR3 SDRAM • IPMI 2.0 + KVM with dedicated LAN • UID LED |
| Chipset/ Serverboard | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER● X8DTT-IBQF/IBXF | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER● X8DTT-INFF | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER● X8DTT-F/X8DTT-L |
| System Memory (Max.) | Quad set of 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs | Quad set of 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs | Quad set of 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs |
| Expansion Slots | Quad set of PCI-E 2.0 x16 via riser card (Low-profile) Quad set of ConnectX QDR 40Gbps InfiniBand w/QSFP connector (6026TT-BIBQF) Quad set of ConnectX DDR 20Gbps InfiniBand w/QSFP connector (6026TT-BIBXF) | Quad set of PCI-E 2.0 x16 via riser card (Low-profile) Quad set of InfiniHost III InfiniBand connector | Quad set of PCI-E 2.0 x16 via riser card (Low-profile) |
| Onboard Storage Controller | Quad set of Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Quad set of Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Quad set of Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) |
| Onboard LAN/VGA | Quad set of Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Quad set of Matrox G200eW graphics | Quad set of Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Quad set of Matrox G200eW graphics | Quad set of Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Quad set of Matrox G200eW graphics |
| Manageability | Quad set of IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | Quad set of IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | Quad set of IPMI 2.0 + KVM with dedicated LAN (6026TT-BTF), Super Doctor® III, Watch Dog |
| Drive Bays | Quad set of 3 x 3.5" hot-swap drive bays | Quad set of 3 x 3.5" hot-swap drive bays | Quad set of 3 x 3.5" hot-swap drive bays |
| Peripheral Bays | N/A | N/A | N/A |
| Power Supply | 1200W high-efficiency Gold-level power supply w/PMBus | 1200W high-efficiency Gold-level power supply w/PMBus | 1200W high-efficiency Gold-level power supply w/PMBus |
| Cooling System | Twin set of 2 x 8cm hot-swap cooling fans w/optimal fan speed control & air shroud | Twin set of 2 x 8cm hot-swap cooling fans w/optimal fan speed control & air shroud | Twin set of 2 x 8cm hot-swap cooling fans w/optimal fan speed control & air shroud |
| Form Factor | 2U Rackmount 437 x 89 x 724mm (17.2" x 3.5" x 28.5") | 2U Rackmount 437 x 89 x 724mm (17.2" x 3.5" x 28.5") | 2U Rackmount 437 x 89 x 724mm (17.2" x 3.5" x 28.5") |

80 PLUS GOLD 2U Twin²
40 Gbps InfiniBand

80 PLUS GOLD 2U Twin²
InfiniBand

80 PLUS GOLD 2U Twin²

80 PLUS GOLD 18 DIMMs



| SuperServer 6026TT-IBQF SuperServer 6026TT-IBXF | SuperServer 6026TT-INFF | SuperServer 6026TT-TF SuperServer 6026TT-TL | SuperServer 6026T-NTR+ |
|---|---|--|--|
| Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) |
| HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | HPC cluster computer nodes, data center data farm, front-end server and other computing intensive applications | High end enterprise server. SQL server, high performance computing cluster (HPCC) |
| <ul style="list-style-type: none"> • Four nodes in 2U • 40/20 Gigabit InfiniBand controller onboard • 1200W Gold Level high-efficiency power supply w/PMBus • 384 GB DDR3 SDRAM • IPMI 2.0 + KVM with dedicated LAN • UID LED | <ul style="list-style-type: none"> • Four nodes in 2U • InfiniBand controller onboard • 1200W Gold Level high-efficiency power supply w/PMBus • 384 GB DDR3 SDRAM • IPMI 2.0 + KVM with dedicated LAN • UID LED | <ul style="list-style-type: none"> • Four nodes in 2U • 1200W Gold Level high-efficiency power supply w/PMBus • 384 GB DDR3 SDRAM • IPMI 2.0 + KVM with dedicated LAN • UID LED | <ul style="list-style-type: none"> • Eight SATA drive bays • 144GB DDR3 SDRAM • 3 PCI-E + 3 PCI slots • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • Redundant 720W High-efficiency Gold level power supply w/PMBus |
| Intel® 5520 chipset with QPI up to 6.4GT/s SUPER [®] X8DTT-IBQF/IBXF | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER [®] X8DTT-INFF | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER [®] X8DTT-F/X8DDT-L | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER [®] X8DTN+ |
| Quad set of 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs | Quad set of 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs | Quad set of 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs | 144GB of DDR3 Reg. ECC 1333/1066/800 MHz SDRAM in 18 DIMMs |
| Quad set of PCI-E 2.0 x16 via riser card (Low-profile) Quad set of ConnectX QDR 40Gbps InfiniBand w/QSFP connector (6026TT-IBQF) Quad set of ConnectX DDR 20Gbps InfiniBand w/QSFP connector (6026TT-IBXF) | Quad set of PCI-E 2.0 x16 via riser card (Low-profile) Quad set of InfiniHost III InfiniBand connector | Quad set of PCI-E 2.0 x16 via riser card (Low-profile) | 2 PCI-E 2.0 x8 (1 in x16 slot) 1 PCI-E x4 (in x8 slot) 3 PCI-X 133/100 1 UIO (PCI-E 2.0 x8) |
| Quad set of Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Quad set of Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Quad set of Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) |
| Quad set of Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Quad set of Matrox G200eW graphics | Quad set of Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Quad set of Matrox G200eW graphics | Quad set of Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Quad set of Matrox G200eW graphics | Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) ATI® ES1000 32MB graphics controller |
| Quad set of IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | Quad set of IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | Quad set of IPMI 2.0 + KVM with dedicated LAN (6026TT-TF), Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN, Super Doctor® III, Watch Dog) |
| Quad set of 3 x 3.5" hot-swap drive bays | Quad set of 3 x 3.5" hot-swap drive bays | Quad set of 3 x 3.5" hot-swap drive bays | 8 x 3.5" hot-swap drive bays |
| N/A | N/A | N/A | 1 slim DVD-ROM drive 1 slim floppy drive |
| 1200W high-efficiency Gold-level power supply w/PMBus | 1200W high-efficiency Gold-level power supply w/PMBus | 1200W high-efficiency Gold-level power supply w/PMBus | 720W redundant high-efficiency Gold level power supply w/PMBus |
| Twin set of 2 x 8cm hot-swap cooling fans w/optimal fan speed control & air shroud | Twin set of 2 x 8cm hot-swap cooling fans w/optimal fan speed control & air shroud | Twin set of 2 x 8cm hot-swap cooling fans w/optimal fan speed control & air shroud | 3 x 8cm hot-swap cooling fans w/optimal fan speed control & air shroud |
| 2U Rackmount 437 x 89 x 724mm (17.2" x 3.5" x 28.5") | 2U Rackmount 437 x 89 x 724mm (17.2" x 3.5" x 28.5") | 2U Rackmount 437 x 89 x 724mm (17.2" x 3.5" x 28.5") | 2U Rackmount 437 x 89 x 648mm (17.2" x 3.4" x 25.5") |

80 PLUS GOLD
QPI & DDR3
SAS RAID 5



80 PLUS GOLD
QPI & DDR3
UIO



QPI & DDR3



| MODEL | SuperServer 6026T-3RF | SuperServer 6026T-URF | SuperServer 6026T-T |
|-----------------------------|--|--|---|
| Processor Support | Quad-Core/Dual-Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual-Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual-Core Intel® Xeon® processor 5500 series (LGA1366) |
| Key Applications | High end enterprise server. SQL server, high performance computing cluster (HPCC) | High end enterprise server. SQL server, high performance computing cluster (HPCC) | High end enterprise server. SQL server, high performance computing cluster (HPCC) |
| Outstanding Features | <ul style="list-style-type: none"> • Eight SAS/SATA drive bays • 96GB DDR3 SDRAM • IPMI 2.0 + KVM with dedicated LAN • 720W high-efficiency Gold-level power | <ul style="list-style-type: none"> • Universal I/O (UIO) slot • Eight SAS/SATA drive bays • 96GB DDR3 SDRAM • IPMI 2.0 + KVM with dedicated LAN • 720W high-efficiency Gold-level power | <ul style="list-style-type: none"> • Six SATA drive bays • 96GB DDR3 SDRAM • 5 PCI-E slots • 650W high-efficiency power • Cost-effective 2U server |
| Chipset/ Serverboard | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER [®] X8DT3-F | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER [®] X8DTU-F | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER [®] X8DTE |
| System Memory (Max.) | 96GB of DDR3 Reg. ECC 1333/1066/800 MHz SDRAM in 12 DIMMs | 96GB of DDR3 Reg. ECC 1333/1066/800 MHz SDRAM in 12 DIMMs | 96GB of DDR3 Reg. ECC 1333/1066/800 MHz SDRAM in 12 DIMMs |
| Expansion Slots | 3 PCI-E 2.0 x8 (1 in x16 slot) 1 PCI -E x4 2 PCI | 1 UIO 2 PCI-E 2.0 x8 | 4 PCI-E 2.0 x8 (2 in x16) 1 PCI-E x4 (in x8) 1 PCI |
| Onboard SATA RAID | LSI® 1068E 8-port 8 SAS controller Optional AOC-iButton68 (RAID 5) RAID 0, 1, 10 Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) |
| Onboard LAN/VGA | Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Matrox G200eW graphics | Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Matrox G200eW graphics | Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Matrox G200eW graphics |
| Manageability | IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | IPMI 2.0 + KVM with dedicated LAN, Super Doctor® III, Watch Dog | Super Doctor® III, Watch Dog |
| Drive Bays | 8 x 3.5" hot-swap drive bays | 8 x 3.5" hot-swap drive bays | 6 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) |
| Peripheral Bays | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive |
| Power Supply | Redundant 720W High-efficiency Gold level power supply w/PMBus | Redundant 720W High-efficiency Gold level power supply w/PMBus | 650W high-efficiency power supply |
| Cooling System | 3 x 8cm hot-swap cooling fans w/optimal fan speed control & air shroud | 3 x 8cm hot-swap cooling fans w/optimal fan speed control & air shroud | 4 x 8cm heavy-duty fans w/optimal fan speed control & air shroud |
| Form Factor | 2U Rackmount 437 x 89 x 648mm (17.2" x 3.4" x 25.5") | 2U Rackmount 437 x 89 x 648mm (17.2" x 3.4" x 25.5") | 2U Rackmount 483 x 89 x 645mm (17.2" x 3.5" x 25.5") |



| SuperServer 6025W-NTR+V/ NTR+B | SuperServer 6025C-URV/URB | SuperServer 6025W-URV/URB | SuperServer 6025B-URV/URB |
|---|---|---|---|
| Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300LV/5200/5100LV series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300LV/5200/5100LV series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300/5200/5100 series (LGA771) |
| High-end enterprise server, SQL server, high performance computing cluster (HPCC) | High-end enterprise server, SQL server, high performance computing cluster (HPCC) | High-end enterprise server, SQL server, high performance computing cluster (HPCC) | Business critical applications, front-end server, database applications, primary server for mid-size companies, Internet, e-business, server clustering |
| <ul style="list-style-type: none"> • 6 SATA drive bays with SGPIO • PCI-E Gen 2.0 & PCI-X slots • 128GB FB-DIMM memory • 2 Gigabit Ethernet ports • 1 serial port & 2 USB 2.0 ports • IPMI 2.0 with virtual media over LAN & optiona; KVM-over-LAN • 700W redundant high-efficiency power supply | <ul style="list-style-type: none"> • 8 hot-swap drive bays • Universal I/O (UIO) slot • 48GB FB-DIMM memory • 2 PCI-E Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optiona KVM-over-LAN • 4 full-height & 3 low-profile • 700W redundant high-efficiency power supply | <ul style="list-style-type: none"> • 8 hot-swap drive bays • Universal I/O (UIO) slot • 64 GB FB-DIMM memory • 2 Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • 4 full-height & 3 low-profile • 700W redundant high-efficiency power supply | <ul style="list-style-type: none"> • 8 hot-swap drive bays • Universal I/O (UIO) slot • 32 GB FB-DIMM memory • 2 Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • 4 full-height & 3 low-profile • 700W redundant high-efficiency power supply |
| Intel® 5400 chipset with 1.6GHz FSB/ SUPER● X7DWN+ | Intel® 5100 chipset with 1.33GHz FSB/ SUPER● X7DCU | Intel® 5400 chipset with 1.6GHz FSB/ SUPER● X7DWU | Intel® 5000P chipset with 1.33GHz FSB/ SUPER● X7DBU |
| 128 GB Fully-Buffered DIMM (FBD) DDRII 800/667 in 16 DIMM sockets 1.8V & 1.5V FB-DIMM support | 48 GB Dual-Channel ECC Reg. DDRII 667/533 in 6 DIMM sockets | 64 GB Fully-buffered DIMM (FBD) DDRII 800/667 in 8 DIMM sockets | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets |
| 3 PCI-E x8 (2 in Gen 2.0) 1 PCI-E x4 2 PCI-X 133MHz 1 Universal I/O (UIO) slot (all are low-profile slots) | Right slot: 2 PCI-E x4 (low-profile) 1 PCI-X 133 (3.3V) Left slot: 1 Universal I/O (UIO) 3 PCI-E x8 (full-height/full-length) | Right slot (low-profile): 2 PCI-E x8 Gen 2.0 Left slot (full-height): 1 Universal I/O (UIO) slot via riser card 3 PCI-E x8 or 3 PCI-X 133 optional | Right slot (low-profile): 1 PCI-X 133 2 PCI-E x4 (in x8 slot) Left slot (full-height): 1 Universal I/O (UIO) slot via riser card 3 PCI-E x8 or 3 PCI-X 133 optional |
| Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 optional UIO SAS controller cards | Intel® ICH9R for 6 SATA (3Gbps); RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 Optional UIO SAS controller cards | Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 Optional UIO SAS controller cards |
| Dual LAN with Intel® 82575EB Gigabit Ethernet controller ATI® ES1000 32MB PCI graphics controller | Dual LAN with Intel® 82575EB Gigabit Ethernet controller ATI® ES1000 32MB PCI graphics controller | Dual LAN with Intel® 82563 PCI-Express Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563 PCI-Express Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller |
| SIMSO+ socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| 8 x 3.5" hot-swap drive bays & 2 x 3.5" internal drive bays | 8 x 3.5" hot-swap drive bays & 2 x 3.5" internal drive bays | 8 x 3.5" hot-swap drive bays & 2 x 3.5" internal drive bays | 8 x 3.5" hot-swap drive bays & 2 x 3.5" internal drive bays |
| 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive |
| Redundant high-efficiency 700W w/I ² C power supply | Redundant high-efficiency 700W w/I ² C power supply | Redundant high-efficiency 700W w/I ² C power supply | Redundant high-efficiency 700W w/I ² C power supply |
| 3 x 8cm heavy-duty fans with optimal fan speed control & air shroud | 3 x 8cm heavy-duty fans with optimal fan speed control & air shroud | 3 x 8cm heavy-duty fans with optimal fan speed control & air shroud | 3 x 8cm heavy-duty fans with optimal fan speed control & air shroud |
| 2U Rackmount 437 x 89 x 648mm (17.2" x 3.5" x 25.5") | 2U Rackmount 437 x 89 x 648mm (17.2" x 3.5" x 25.5") | 2U Rackmount 437 x 89 x 648mm (17.2" x 3.5" x 25.5") | 2U Rackmount 437 x 89 x 648mm (17.2" x 3.5" x 25.5") |

16 FB-DIMM



16 FB-DIMM



| MODEL | SuperServer 6025B-8R+V/8R+B | SuperServer 6025B-TR+V/TR+B | SuperServer 6025B-3V/3B |
|-----------------------------|--|--|--|
| Processor Support | Quad-Core/Dual-Core Intel® Xeon® Processor 5400/5300/5200/5100/5000 series (LGA 771) | Quad-Core/Dual-Core Intel® Xeon® Processor 5400/5300/5200/5100/5000 series (LGA 771) | Quad-Core/Dual-Core Intel® Xeon® Processor 5400/5300/5200/5100/5000 series (LGA 771) |
| Key Applications | Business critical applications, front-end server, database applications, primary server for mid-size companies, Internet, e-business, server clustering | Business critical applications, front-end server, database applications, primary server for mid-size companies, Internet, e-business, server clustering | Business critical applications, front-end server, database applications, primary server for mid-size companies, Internet, e-business, server clustering |
| Outstanding Features | <ul style="list-style-type: none"> • 8 2-channel SCA drive bays with SAF-TE • 6 PCI-X & PCI-Express • 64 GB FB-DIMM memory • 2 Gigabit Ethernet ports • 1 serial port & 2 USB 2.0 ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • 700W redundant high-efficiency power | <ul style="list-style-type: none"> • 6 SATA drive bays with SGPIO • 6 PCI-X & PCI-Express • 64 GB FB-DIMM memory • 2 Gigabit Ethernet ports • 1 serial port & 2 USB 2.0 ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • 700W redundant high-efficiency power | <ul style="list-style-type: none"> • 8 SAS/SATA drive bays with SES2 • 6 PCI-X & PCI-Express • 32 GB FB-DIMM memory • 2 Gigabit Ethernet ports • 1 serial port & 2 USB 2.0 ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • 560W high-efficiency power supply |
| Chipset/ Serverboard | Intel® 5000P chipset with 1.33GHz FSB/SUPER® X7DB8+ | Intel® 5000P chipset with 1.33GHz FSB/SUPER® X7DBE+ | Intel® 5000P chipset with 1.33GHz FSB/SUPER® X7DB3 |
| System Memory (Max.) | 128 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 16 DIMM sockets | 128 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 16 DIMM sockets | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets |
| Expansion Slots | 2 PCI-E x8 1 PCI-E x4 2 PCI-X 133 MHz 1 PCI-X 100 MHz (all are low-profile slots) | 2 PCI-E x8 1 PCI-E x4 2 PCI-X 133 MHz 1 PCI-X 100 MHz (all are low-profile slots) | 2 PCI-Express x8 1 PCI-Express x4 2 PCI-X 133 MHz 1 PCI-X 100 MHz (all are low-profile slots) |
| Onboard SATA RAID | Adaptec® 7902W 2-channel Ultra320 SCSI Optional AOC-LPZCR3 (RAID 5) Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Adaptec® 9410W for 8 SAS/SATA Optional AOC-LPZCR3 (RAID 5) RAID 0, 1, 10 Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 |
| Onboard LAN/VGA | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller |
| Manageability | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| Drive Bays | 8 x 3.5" dual-channel (4+4) hot-swap Ultra320 SCA drive bays w/SAF-TE & 1 x 3.5" drive bays | 6 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) & 2 x 3.5" spare SATA drive bays & 1 x 3.5" drive bay | 8 x 3.5" hot-swap SAS/SATA drive bays with SES2 & 1 x 5.25" drive bay |
| Peripheral Bays | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive |
| Power Supply | 700W redundant high-efficiency power supply w/TC | 700W redundant high-efficiency power supply w/TC | 560W high-efficiency power supply |
| Cooling System | 3 x 8cm heavy-duty fans w/optimal fan speed control & air shroud | 3 x 8cm heavy-duty fans w/optimal fan speed control & air shroud | 3 x 8cm heavy-duty fans w/optimal fan speed control & air shroud |
| Form Factor | 2U Rackmount 483 x 89 x 645mm (17.2" x 3.5" x 25.5") | 2U Rackmount 483 x 89 x 645mm (17.2" x 3.5" x 25.5") | 2U Rackmount 483 x 89 x 645mm (17.2" x 3.5" x 25.5") |



| SuperServer 6025B-3RV/3RB | SuperServer 6025B-8 SuperServer 6025B-8B | SuperServer 6025B-T SuperServer 6025B-TB | SuperServer 8025C-3RB |
|--|--|--|--|
| Quad-Core/Dual-Core Intel® Xeon® Processor 5400/5300/5200/5100/5000 series (LGA 771) | Quad-Core/Dual-Core Intel® Xeon® Processor 5400/5300/5200/5100/5000 series (LGA 771) | Quad-Core/Dual-Core Intel® Xeon® Processor 5400/5300/5200/5100/5000 series (LGA 771) | Six-Core/Quad-Core Intel® Xeon® MP Processor 7400/7300/7200 series |
| Business critical applications, front-end server, database applications, primary server for mid-size companies, Internet, e-business, server clustering | Business critical applications, front-end server, database applications, primary server for mid-size companies, Internet, e-business, server clustering | Business critical applications, front-end server, database applications, primary server for mid-size companies, Internet, e-business, server clustering | High-end enterprise server, SQL server, high performance computing cluster (HPCC), high density server farm |
| 8 SAS/SATA drive bays with SES2 • 6 PCI-X & PCI-Express • 32 GB FB-DIMM memory • 2 Gigabit Ethernet ports • 1 serial port & 2 USB 2.0 ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • 700W redundant high-efficiency power supply | • 6 SCA/SATA drive bays • 6 PCI-X & PCI-Express • 32 GB FB-DIMM memory • 2 Gigabit Ethernet ports • ZCR support • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • 550W power supply | • 6 SATA drive bays • 6 PCI-X & PCI-Express • 32 GB FB-DIMM memory • 2 Gigabit Ethernet ports • ZCR support • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • 550W power supply | • 16 processing cores in 2U • 6 SAS drive bays • PCI-E & PCI-X expansions • 192 GB FB-DIMM 667/533 SDRAM • 2 Gigabit Ethernet ports • IPMI 2.0 server management • 1200W high-efficiency redundant power |
| Intel® 5000P chipset with 1.33GHz FSB/ SUPER●® X7DB3 | Intel® 5000P chipset with 1.33GHz FSB/ SUPER●® X7DB8 | Intel® 5000P chipset with 1.33GHz FSB/ SUPER●® X7DB8 | Intel® 7300 chipset with 1.06GHz FSB/ SUPER●® X7QC3 |
| 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 192 GB Fully-buffered DIMM (FBD) DDRII 667/533 in 24 DIMM sockets |
| 2 PCI-Express x8 1 PCI-Express x4 2 PCI-X 133 MHz 1 PCI-X 100 MHz (all are low-profile slots) | 2 PCI-Express x8 1 PCI-Express x4 2 PCI-X 133 MHz 1 PCI-X 100 MHz (all are low-profile slots) | 2 PCI-Express x8 1 PCI-Express x4 2 PCI-X 133 MHz 1 PCI-X 100 MHz (all are low-profile slots) | 1 PCI-E x8 (using x16 slot) 1 PCI-E x8 1 PCI-E x4 (using x8 slot) 1 PCI-X 133MHz (all are low profile slots) |
| Adaptec® 9410W for 8 SAS/SATA Optional AOC-LPZCR3 (RAID 5) RAID 0, 1, 10 Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Adaptec® 7902W 2-channel U320 SCSI Optional AOC-LPZCR3 (RAID 5) RAID 0, 1, 10 Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | LSI® 1068E Dual Channel 8-port SAS controller AOC-iButton68 (RAID5) Intel® ESB2 for 6 SATA; RAID 0, 1, 5, 10 |
| Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82575EB PCI-Express Gigabit Ethernet controller ATI® ES1000 32MB PCI graphics controller |
| SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) SSuper Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| 8 x 3.5" hot-swap SAS/SATA drive bays with SES2 & 1 x 5.25" drive bay | 6 x 3.5" hot-swap Ultra320 SCA drive bays with SAF-TE & 1 x 5.25" drive bay | 6 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) & 1 x 5.25" drive bay | 6 x 3.5" hot-swap SAS drive bays |
| 1 slim DVD-ROM drive | 1 slim DVD-ROM drive 1 floppy drive | 1 slim DVD-ROM drive 1 floppy drive | 1 slim DVD-ROM drive |
| 700W redundant high-efficiency power supply w/PC | 550W power supply | 550W power supply | Redundant high-efficiency 1200W w/PC power supply |
| 3 x 8cm heavy-duty fans w/optimal fan speed control & air shroud | 4 x 8cm heavy duty fans w/optimal fan speed control & air shroud | 4 x 8cm heavy duty fans w/optimal fan speed control & air shroud | 6 x 8cm hot-swap fans w/optimal fan speed control and air shroud |
| 2U Rackmount 437 x 89 x 648mm (17.2" x 3.5" x 25.5") | 2U Rackmount 426 x 89 x 650mm (16.8" x 3.5" x 25.6") | 2U Rackmount 426 x 89 x 650mm (16.8" x 3.5" x 25.6") | 2U Rackmount 437 x 89 x 705mm (17.2" x 3.5" x 27.75") |



| MODEL | SuperServer 5026T-3F | SuperServer 5026T-T | SuperServer 5025B-URV/URB |
|-----------------------------|---|---|---|
| Processor Support | Single Quad-Core/Dual-Core Intel® Core™ i7 and Xeon® 5500/3500 series (LGA 1366 socket) | Single Quad-Core/Dual-Core Intel® Core™ i7 and Xeon® 5500/3500 series (LGA 1366 socket) | *Single Intel® Quad-Core/Dual-Core Xeon® 3000 Sequence, Core 2 Extreme/Quad/Duo (LGA 775 socket) |
| Key Applications | Business critical applications, front-end server, database applications, primary server for mid-size companies, Internet, e-business, server clustering | Business critical applications, front-end server, database applications, primary server for mid-size companies, Internet, e-business, server clustering | NAS storage, file server, mail server, web server for small businesses & other server applications |
| Outstanding Features | <ul style="list-style-type: none"> • 6 SAS drive bays • PCI-Express & PCI slots • 24 GB DDR3 1333/1066/800 SDRAM • 2 Gigabit Ethernet ports • 400W high-efficiency power supply • IPMI 2.0 with dedicated LAN | <ul style="list-style-type: none"> • 6 SATA drive bays • PCI-Express & PCI slots • 24 GB DDR3 1333/1066/800 SDRAM • 2 Gigabit Ethernet ports • 400W high-efficiency power supply | <ul style="list-style-type: none"> • 8 hot-swap drive bays • Universal I/O (UIO) slot • 8 GB DDRIII 667 SDRAM • 2 Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • 4 full-height |
| Chipset/ Serverboard | Intel® X58 chipset with QPI up to 6.4 GT/s SUPER● X8ST3-F | Intel® X58 chipset with QPI up to 6.4 GT/s SUPER● X8STE | Intel® X48 chipset with 1.6GHz FSB/ SUPER● X7DBU |
| System Memory (Max.) | 24 GB of Unb. ECC, non ECC DDRIII 1333/1066/800 SDRAM in 6 DIMM sockets | 24 GB of Unb. ECC, non ECC DDRIII 1333/1066/800 SDRAM in 6 DIMM sockets | 8 GB of Unb., non ECC DDRIII 1333/1066/800 SDRAM; up to non-ECC 1600 MHz in 4 DIMM sockets |
| Expansion Slots | 3 PCI-E 2.0 x8 (in x16 slot) 1 PCI-E x4 (in x8 slot) 2 PCI | 3 PCI-E 2.0 x8 (in x16 slot) 1 PCI-E x4 (in x8 slot) 2 PCI | Right slot: 1 PCI-E x4 (in x8 slot) Left slot: 2 PCI-E x8 Gen 2.0 |
| Onboard SATA RAID | LSI® 1068E 8-port SAS controller Optional AOC-iButton68 (RAID 5) RAID 0, 1, 10 Intel® ICH10R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH10R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH9R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 Optional UIO SAS controller card |
| Onboard LAN/VGA | Dual LAN with Intel® 82574L Gigabit Ethernet controllers Integrated server quality graphics | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82573EB Gigabit Ethernet controller ATI® ES1000 32MB PCI graphics controller |
| Manageability | IPMI 2.0 with dedicated LAN Super Doctor® III, Watch Dog | Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| Drive Bays | 6 x 3.5" hot-swap SAS drive bays | 6 x 3.5" hot-swap SATA drive bays | 8 x 3.5" hot-swap drive bays & 2 x 3.5" internal drive bays |
| Peripheral Bays | N/A | N/A | 1 slim DVD-ROM drive |
| Power Supply | 400W high-efficiency power supply | 400W high-efficiency power supply | Redundant high-efficiency 700W w/I ² C |
| Cooling System | 4 x 8cm hot-swap redundant cooling fans | 4 x 8cm hot-swap redundant cooling fans | 3 x 8cm fans w/optimal fan speed control |
| Form Factor | 2U Rackmount 426 x 89 x 650mm (16.8" x 3.5" x 25.6") | 2U Rackmount 426 x 89 x 650mm (16.8" x 3.5" x 25.6") | 2U Rackmount 483 x 89 x 645mm (17.2" x 3.5" x 25.5") |



| SuperServer 5025B-4/4B | SuperServer 5025B-T/TB | SuperServer 5025M-URV/URB | SuperServer 5025M-4+i+ SuperServer 5025M-4+B/i+B |
|--|--|--|--|
| *Single Intel® Quad-Core/Dual-Core Xeon® 3000 Sequence, Core 2 Extreme/Quad/Duo (LGA 775 socket) | *Single Intel® Quad-Core/Dual-Core Xeon® 3000 Sequence, Core 2 Extreme/Quad/Duo (LGA 775 socket) | *Single Intel® Quad-Core Extreme QX6700 Xeon® 3200/3000 & Core 2 Duo processor E6000 & E4000 sequence (LGA775) | *Single Intel® Quad-Core Extreme QX6700 Xeon® 3200/3000 & Core 2 Duo processor E6000 & E4000 sequence (LGA775) |
| Business critical applications, front-end server, database applications, primary server for mid-size companies, Internet, e-business, server clustering | Business critical applications, front-end server, database applications, primary server for mid-size companies, Internet, e-business, server clustering | NAS storage, file server, mail server, web server for small businesses & other server applications | Business critical applications, front-end server, database applications, primary server for mid-size companies, Internet, e-business, server clustering |
| <ul style="list-style-type: none"> • 6 SCA drive bays • PCI-X & PCI-Express slots • 8 GB DDRII 800/667 SDRAM • 2 Gigabit Ethernet ports • SIMLC for management • 400W high-efficiency power supply | <ul style="list-style-type: none"> • 6 SCA drive bays • PCI-X & PCI-Express slots • 8 GB DDRII 800/667 SDRAM • 2 Gigabit Ethernet ports • SIMLC for management • 400W high-efficiency power supply | <ul style="list-style-type: none"> • 8 hot-swap drive bays • Universal I/O (UIO) slot • 8 GB DDRII 667 SDRAM • 2 Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • 4 full-height | <ul style="list-style-type: none"> • 6 SCA/fix drive bays • 4 PCI-X, 2 PCI-Express • 8 GB DDRII 677 SDRAM • 2 Gigabit Ethernet ports • SIM1U slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) • 550W power supply |
| Intel® 3210 chipset with 1.33GHz FSB/ SUPER●® X7SB4 | Intel® 3210 chipset with 1.33GHz FSB/ SUPER●® X7SBE | Intel® 3010 chipset with 1.06GHz FSB/ SUPER●® PDSMU | Intel® 3010 chipset with 1.06GHz FSB/ SUPER●® PDSM4+ |
| 8 GB Dual-channel Unb. ECC, non ECC DDRII 800/667 SDRAM in 4 DIMM sockets | 8 GB Dual-channel Unb. ECC, non ECC DDRII 800/667 SDRAM in 4 DIMM sockets | 8 GB Dual-channel Unb. ECC, non ECC DDRII 800/667 SDRAM in 4 DIMM sockets | 8GB Dual-Channel Unb. ECC, non-ECC DDRII 677/533/400 SDRAM in 4 DIMM sockets |
| 4 PCI-X 133/100MHz 1 PCI-E x8 1 PCI-E x4 | 4 PCI-X 133/100MHz 1 PCI-E x8 1 PCI-E x4 | Left slot (full-height): 1 Universal I/O (UIO) slot via riser card 3 PCI-E x8 or 3 PCI-X 133 optional | 2 64-bit PCI-X 133MHz 2 64-bit PCI-X 100MHz 1 PCI-E x4 1 PCI-E x8 (all are low-profile slots) |
| Adaptec® Ultra320 SCSI Optional AOC-LPZCR3 (RAID 5) RAID 0, 1, 10 Intel® ICH9R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 | Intel® ICH9R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 | Intel® ICH7R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 Optional UIO SAS controller cards | Adaptec® Ultra320 SCSI Optional AOC-LPZCR3 (RAID 5) Intel® ICH7R for 4 SATA (3Gbps); RAID 0, 1, 5, 10 |
| Dual LAN with Intel® 82573EB Gigabit Ethernet controller ATI® ES1000 32MB PCI graphics controller | Dual LAN with Intel® 82573EB Gigabit Ethernet controller ATI® ES1000 32MB PCI graphics controller | Dual LAN with Intel® 82573EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82573 Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller |
| SIMLC slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMLC slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIM1U slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| 6 x 3.5" hot-swap Ultra320 SCA drive bays (SAF-TE compliant) | 6 x 3.5" hot-swap drive bays | 8 x 3.5" hot-swap SATA drive bays & 2 x 3.5" drive bay | 5025M-4+: 6 x 3.5" hot-swap Ultra320 SCA drive bays (SAF-TE compliant) & 1 x 5.25" drive bay 5025M-i+: 2 fixed drive carriages support 4 SATA drives & 1 x 5.25" drive bay |
| 1 floppy drive | 1 slim DVD-ROM drive 1 floppy drive | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive 1 floppy drive |
| 400W high-efficiency power supply | 400W high-efficiency power supply | Redundant high-efficiency 700W w/I ² C | 550W power supply |
| 4 x 8cm hot-swap redundant cooling fans | 4 x 8cm hot-swap redundant cooling fans | 3 x 8cm fans w/optimal fan speed control | 4 x 8cm hot-swap redundant cooling fans |
| 2U Rackmount 426 x 89 x 650mm (16.8" x 3.5" x 25.6") | 2U Rackmount 426 x 89 x 650mm (16.8" x 3.5" x 25.6") | 2U Rackmount 437 x 89 x 648mm (17.2" x 3.5" x 25.5") | 2U Rackmount 426 x 89 x 650mm (16.8" x 3.5" x 25.6") |

**QPI & DDR3
SAS RAID 5**



**100%
Cooling redundancy**



**100%
Cooling redundancy**



| MODEL | SuperServer 6036T-3R | SuperServer 6035B-8R+V/8R+B | SuperServer 6035B-8R/8 SuperServer 6035B-8RB/8B |
|------------------------------|--|---|---|
| Processor Support | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® Processor 5400/5300/5200/5100/5000 series (LGA 771) | Quad-Core/Dual Core Intel® Xeon® Processor 5400/5300/5200/5100/5000 series (LGA 771) |
| Key Applications | Enterprise server, large database, e-business, internet, on-line transaction processing, business critical applications | Enterprise server, large database, e-business, internet, on-line transaction processing, business critical applications | Enterprise server, large database, e-business, internet, on-line transaction processing, business critical applications |
| Outstanding Features | <ul style="list-style-type: none"> • 100% cooling redundancy • 96GB DDR3 SDRAM • 2 Gigabit Ethernet ports • 800W redundant power | <ul style="list-style-type: none"> • 100% cooling redundancy • 16 2-CH (8+8) SCA drive bays w/SAF-TE • 6 PCI-X & PCI-Express • 64 GB FB-DIMM memory • 2 Gigabit Ethernet ports • SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) • 800W high-efficiency redundant power supply | <ul style="list-style-type: none"> • 100% cooling redundancy • 8 2-CH (8+8) SCA drive bays w/SAF-TE • 6 PCI-X & PCI-Express • 32 GB FB-DIMM memory • 2 Gigabit Ethernet ports • SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) • Triple redundant 760W +380W power supply |
| Chipset/ Serverboard | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER® X8DT3 | Intel® 5000P chipset with 1.33GHz FSB/ SUPER® X7DB8+ | Intel® 5000P chipset with 1.6GHz FSB/ SUPER® X7DB8 |
| System Memory (Max.) | 96GB of DDR3 Reg. ECC 1333/1066/800 MHz SDRAM in 12 DIMMs | 64 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 16 DIMM sockets | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets |
| Expansion Slots | 3 PCI-E 2.0 x8 (1 in x16 slot) 1 PCI-E x4 2 PCI | 2 PCI-Express x8 1 PCI-Express x4 2 PCI-X 133 MHz 1 PCI-X 100 MHz | 2 PCI-Express x8 1 PCI-Express x4 2 PCI-X 133 MHz 1 PCI-X 100 MHz |
| Onboard SATA RAID | LSI® 1068E 8-port SAS controller Optional AOC-iButton68 (RAID 5) RAID 0, 1, 10 Intel® ICH10R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Adaptec® 7902W 2-channel Ultra320 SCSI Optional AOC-iButton68 (RAID 5) Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Adaptec® 7902W 2-channel Ultra320 SCSI Optional AOC-iButton68 (RAID 5) Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 |
| Onboard LAN/VGA/Audio | Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Matrox G200eW graphics | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller |
| Manageability | Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| Drive Bays | 8 x 3.5" hot-swap drive bays | 16 x 3.5" dual-channel (8+8) hot-swap Ultra320 SCA drive bays with SAF-TE | 8 x 3.5" dual-channel (4+4) hot-swap Ultra320 SCA drive bays w/SAF-TE & 2 x 5.25" drive bays |
| Peripheral Bays | N/A | 1 slim DVD-ROM drive | 1 slim DVD-ROM drive 1 floppy drive |
| Power Supply | 800W redundant high-efficiency power supply w/FC | 800W redundant high-efficiency power supply w/FC | 6035B-8R/8RB: Triple redundant (760W + 380W) power supply w/FC 6035B-8/8B: 550W power supply |
| Cooling System | 5 x 8cm heavy duty fans w/optimal fan speed control & air shroud; 100% cooling redundancy | 5 x 8cm heavy duty fans w/optimal fan speed control & air shroud; 100% cooling redundancy | 4 x 9cm & 2 x 8cm hot-swap redundant cooling fans w/ optimal fan speed control & air shroud; 100% cooling redundancy |
| Form Factor | 3U Rackmount 437 x 132 x 648mm (17.2" x 5.2" x 25.5") | 3U Rackmount 437 x 132 x 648mm (17.2" x 5.2" x 25.5") | 3U Rackmount 450 x 132 x 648mm (17.7" x 5.2" x 25.5") |

**QPI & DDR3
Whisper-Quiet**



Whisper-Quiet 25dB



Whisper-Quiet



**SLI Technology
QPI & DDR3
Whisper-Quiet**



| SuperWorkstation 5036T-TB | SuperServer 5035L-iB | SuperWorkstation 5035B-TB | SuperWorkstation 5046A-X |
|--|--|---|---|
| Single Quad-Core/Dual-Core Intel® Core™ i7 & Xeon® 5500/3500 Series (LGA 1366) | Single Intel® Core™ 2 Duo, Pentium 4 & Celeron (LGA775) | Single Intel® Core 2 Duo / Quad and Extreme processors (LGA 775) | Single Quad-Core/Dual-Core Intel® Core™ i7 & Xeon® 5500/3500 Series (LGA 1366) |
| Small business, high-end workstation, 2D/3D & CAD applications, gaming | SOHO, Small business, high-end workstation, 2D/3D & CAD applications, gaming | Small business, high-end workstation, 2D/3D & CAD applications, gaming | Small business, high-end workstation, 2D/3D & CAD applications, gaming |
| <ul style="list-style-type: none"> • 4 SATA hot-swap drive bays • Up to 24GB DDR3 memory • 2 PCI-Express x16 slots (Gen. 2.0) • Front side USB 2.0 ports (Up to 12 total) • Low-noise 465W high-efficiency power • Whipse-quiet 27dB | <ul style="list-style-type: none"> • 2 GB DDRII 667/533 SDRAM • 2 Gigabit Ethernet ports • 300W high-efficiency power supply • Tool-less chassis design • Whipse-quiet 25dB | <ul style="list-style-type: none"> • 4 SATA hot-swap drive bays • Up to 8GB DDR3 memory • 2 PCI-Express x16 slots (Gen. 2.0) • PCI-E Gigabit Ethernet port • Front side USB 2.0 ports (Up to 12 total) • Low-noise 465W high-efficiency power | <ul style="list-style-type: none"> • 6 SATA hot-swap drive bays • Up to 24GB DDR3 memory • 2 PCI-Express x16 slots (Gen. 2.0) • PCI-E Gigabit Ethernet port • Front side USB 2.0 ports (Up to 12 total) • Low-noise 865W high-efficiency power • Whipse-quiet 27dB • Rear Firewire 1394a headers • Supports nVidia® SLI™ and ATI® CrossFireX™ Technology |
| Intel® X58 chipset with QPI up to 6.4TG/s SUPER● X8SAX | Intel® 945GC chipset with 800MHz FSB/SUPER● X7SLM-L | Intel® X38 chipset with 1.33GHz FSB/SUPER● C2SBX | Intel® X58 chipset with QPI up to 6.4TG/s SUPER● C7X58 |
| 24 GB DDR3 ECC or non-ECC Unb. 1333/1066/800 SDRAM in 6 DIMM sockets | 2 GB Unb. non ECC DDR2 667/533/400 SDRAM in 2 DIMM sockets | 8 GB DDR3 Unb. ECC or non-ECC DDR3 1333/1066/800MHz in 4 DIMM sockets | 24 GB DDR3 ECC or non-ECC Unb. 1333/1066/800 SDRAM in 6 DIMM sockets |
| <p>2 PCI-Express x16 (Gen. 2.0)</p> <p>1 PCI-E x4 (in x8 slot)</p> <p>2 PCI-X 133/100MHz</p> <p>1 PCI 33MHz</p> | <p>1 PCI-E x16</p> <p>1 PCI-E x4 (in x8)</p> <p>2 PCI</p> | <p>2 PCI-Express x16 (Gen. 2.0)</p> <p>1 PCI-Express x1</p> <p>2 PCI-X 133/100MHz</p> <p>2 PCI 33MHz</p> <p>1 Rear Firewire 1394 Port</p> | <p>2 PCI-Express x16 (Gen. 2.0)</p> <p>1 PCI-E x4 (in x8 slot)</p> <p>1 PCI 33MHz</p> <p>1 Rear Firewire 1394a headers</p> |
| Intel® ICH10R for 6 SATA2 (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH7R for 4 SATA (3 Gbps) RAID 0, 1, 5, 10 | Intel® ICH9R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 | Intel® ICH10R for 6 SATA2 (3 Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) |
| Dual LAN with Intel® 82574L Gigabit Ethernet controller 7.1 Channel High Definition Audio Up to 12 USB connections 1 Rear Firewire 1394a headers Supports nVidia® SLI™ and ATI® CrossFireX™ Technology | Dual Realtek RTL8111C Gigabit Ethernet controller Intel® GMA 950 Graphics | Intel® 82566 Gigabit Ethernet controller 7.1 Channel High Definition Audio Up to 12USB connectors | Dual LAN with Intel® 82574L Gigabit Ethernet controller Supports nVidia® SLI™ and ATI® CrossFireX™ Technology 7.1 Channel High Definition Audio Up to 12 USB connections |
| Super Doctor® III, Watch Dog | Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | Super Doctor® III, Watch Dog |
| 4 x 3.5" hot-swap SATA drive bays | 4 x 3.5" internal drive bays 2 x 5.25" external drive bays 90 degree rotating hard drive cage | 4 x 3.5" hot-swap SATA drive bays | 6 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) & 2 x 3.5" spare SATA drive bays & 2 x 5.25" drive bays |
| N/A | 1 slim DVD-ROM drive optional | N/A | N/A |
| Low-noise 465W high-efficiency power supply & 6-pin 12V power for high-end graphics card | 300W high-efficiency power supply | Redundant high-efficiency 700W w/I²C | Low-noise 865W high-efficiency power w/ 6-pin power for high-end graphics card |
| 1 x 9.2cm front thermal cooling fan & 1 x 12cm exhaust fan (optional) | 1 x 9.2cm front thermal cooling fan & 1 x 12cm exhaust fan (optional) | 1 x 9.2cm front thermal fan | 2 x 8cm & 1 x 9cm 4-pin Pulse Width Modulated (PWM) fans, active heatsink w/ heatpipe & air shroud |
| Workstation 178 x 427 x 531mm (7" x 16.8" x 20.9") | Mid tower 362 x 184 x 425mm (14.25" x 7.25" x 16.75") | Mid tower 427 x 178 x 530mm (16.8" x 7" x 20.9") | 4U Rackmount/Tower 437 x 178 x 648mm (17.2" x 7" x 25.5") |

Whisper-Quiet 25dB
QPI & DDR3



QPI & DDR3



QPI & DDR3
SAS RAID 5



| MODEL | SuperWorkstation 7036A-T | SuperServer 7046T-NTR+ | SuperServer 7046T-3R |
|------------------------------|---|--|--|
| Processor Support | Quad-Core/Dual Core Intel® Xeon® processor 5500 series (LGA1366) | Quad-Core/Dual Core Intel® Xeon® Processor 5500 series (LGA 1366) | Quad-Core/Dual Core Intel® Xeon® Processor 5500 series (LGA 1366) |
| Key Applications | Small business, high-end workstation, 2D/3D & CAD applications, gaming | Mission-critical applications, enterprise server, large database, e-business, Internet, on-line transaction processing, NAS | High-end workstation, business critical applications, front-end server, database applications, video server |
| Outstanding Features | <ul style="list-style-type: none"> • 4 SAS/SATA hot-swap drive bays • 48GB DDR3 SDRAM • Front side USB 2.0 ports • 665W high-efficiency power supply • 25dB sound level | <ul style="list-style-type: none"> • 100% cooling redundancy • 6 SATA drive bays • 144 GB DDR3 SDRAM • Universal I/O (UIO) support • IPMI 2.0 with virtual media over LAN optional KVM-over-LAN • 800W redundant high-efficiency power | <ul style="list-style-type: none"> • 8 SAS/SATA drive bays with SES2 • 96GB DDR3SDRAM • 2 Gigabit Ethernet ports • 800W low-noise, high-efficiency power |
| Chipset/ Serverboard | Intel® 5500 chipset with QPI up to 6.4GT/s SUPER® X8DAL-i | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER® X8DTN+ | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER® X8DT3 |
| System Memory (Max.) | 48GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 6 DIMMs | 144GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 18 DIMMs | 96GB of Reg. ECC DDR3 1333/1066/800 MHz SDRAM in 12 DIMMs |
| Expansion Slots | 1 PCI-E 2.0 x16 1 PCI-E 2.0 x4 (in x16 slot) 1 PCI-E x4 2 PCI | 2 PCI-E 2.0 x8 (1 in x16 slot) 1 PCI-E x4 (in x8 slot) 3 PCI-X 133/100 MHz 1 UIO (PCI-E 2.0 x8) | 3 PCI-E 2.0 x8 (1 in x16 slot) 1 PCI-E x4 2 PCI |
| Onboard SATA RAID | Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | LSI® 1068E 8-port 8 SAS controller Optional AOC-iButton68 (RAID 5) Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) |
| Onboard LAN/VGA/Audio | Dual LAN with Intel® 82574L Gigabit Ethernet controller (w/IOAT support) 7.1 HD Audio | Dual LAN with Intel® 82576 Gigabit Ethernet controller ATI® ES1000 32MB PCI graphics controller | Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Matrox G200eW graphics |
| Manageability | Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | Super Doctor® III, Watch Dog |
| Drive Bays | 4 x 3.5" hot-swap SAS/SATA drive bays (w/SGPIO), 2 x 5.25" drive bays drive bays | 6 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) & 2 x 3.5" spare SATA drive bays & 3 x 5.25" drive bays | 8 x 3.5" hot-swap SAS/SATA drive bays with SES2 & 3 x 5.25" drive bays |
| Peripheral Bays | N/A | N/A | N/A |
| Power Supply | Low-noise 665W high-efficiency power supply 6-pin 12V power for high-end graphics card | 800W redundant high-efficiency power supply w/FC | 800W redundant high-efficiency power supply w/FC |
| Cooling System | 1 x 12cm exhaust thermal fan & 1 x 9cm thermal cooling fan | 5 x 8cm heavy duty fans w/optimal fan speed control & air shroud; 100% cooling redundancy | 5 x 8cm heavy duty fans w/optimal fan speed control & air shroud; 100% cooling redundancy |
| Form Factor | Workstation 427 x 178 x 531mm (16.8" x 7" x 20.9") | 4U Rackmount/Tower 437 x 178 x 648mm (17.2" x 7" x 25.5") | 4U Rackmount/Tower 437 x 178 x 648mm (17.2" x 7" x 25.5") |



Dual-IOH
3 PCI-E x16
QPI & DDR3



Whisper-Quiet
QPI & DDR3
SAS RAID 5



Whisper-Quiet
QPI & DDR3



| SuperWorkstation 7046A-H+ | SuperWorkstation 7046A-3 | SuperWorkstation 7046A-T | SuperServer 7045W-NTR+ SuperServer 7045W-NTR+B |
|--|--|--|--|
| Quad-Core/Dual Core Intel® Xeon® Processor 5500 series (LGA 1366) | Quad-Core/Dual Core Intel® Xeon® Processor 5500 series (LGA 1366) | Quad-Core/Dual Core Intel® Xeon® Processor 5500 series (LGA 1366) | Quad-Core/Dual-Core Intel® Xeon® Processor 5400/5300LV/5200/5100LV series (LGA 771) |
| High-end workstation, business critical applications, front-end server, database applications, video server | High-end workstation, business critical applications, front-end server, database applications, video server | High-end workstation, business critical applications, front-end server, database applications, video server | Mission-critical applications, enterprise server, large database, e-business, Internet, on-line transaction processing, NAS |
| <ul style="list-style-type: none"> • 8 SATA drive bays • 144GB DDR3 SDRAM • 7 PCI-E slots • 2 Gigabit Ethernet ports • 1200W high-efficiency Gold-level power • 2 IEEE 1394a header + 7.1 HD Audio | <ul style="list-style-type: none"> • 8 SAS/SATA drive bays with SES2 • 96GB DDR3 SDRAM • 2 PCI-E 2.0 x16 slots • 2 Gigabit Ethernet ports • 865W low-noise, high-efficiency power • 2 IEEE 1394a header + 7.1 HD Audio | <ul style="list-style-type: none"> • 6 SATA drive bays • 96GB DDR3 SDRAM • 2 PCI-E 2.0 x16 slots • 2 Gigabit Ethernet ports • 865W low-noise, high-efficiency power • 2 IEEE 1394a header + 7.1 HD Audio | <ul style="list-style-type: none"> • 100% cooling redundancy • 6 SATA drive bays • PCI-E Gen. 2.0 • 128 GB FB-DIMM memory • Universal I/O (UIO) support • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • 800W redundant high-efficiency power |
| Dual Intel® 5520 chipset with QPI up to 6.4GT/s SUPER ● X8DAH+ | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER ● X8DA3 | Intel® 5520 chipset with QPI up to 6.4GT/s SUPER ● X8DAi | Intel® 5400 chipset with 1.6MHz FSB/ SUPER ● X7DWN+ |
| 144GB of Reg. ECC DDRIII 1333/1066/800 MHz SDRAM in 18 DIMMs | 96GB of Reg. ECC DDRIII 1333/1066/800 MHz SDRAM in 12 DIMMs | 96GB of Reg. ECC DDRIII 1333/1066/800 MHz SDRAM in 12 DIMMs | 128 GB Fully-Buffered DIMM (FBD) DDRII 800/667 in 16 DIMM sockets 1.5V & 1.8V FB-DIMM support |
| 2 PCI-E 2.0 x16 4 PCI-E 2.0 x8 (1 in x16 slot) 1 PCI-E x4 | 2 PCI-E 2.0 x16 1 PCI-E x4 (in x8 slot) 3 PCI | 2 PCI-E 2.0 x16 1 PCI-E x4 (in x8 slot) 3 PCI | 3 PCI-E x8 (2 with Gen. 2.0) 1 PCI-E x4 2 PCI-X 133 MHz Universal I/O slot |
| Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | LSI® 1068E 8-port 8 SAS controller Optional AOC-iButton68 (RAID 5) RAID 0, 1, 10 Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ICH10R for 6 SATA (3Gbps) RAID 0, 1, 5, 10 (Windows) RAID 0, 1, 10 (Linux) | Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 |
| Dual LAN with Intel® 82576 Gigabit Ethernet controller (w/IOAT support) Matrox G200eW graphics 2 IEEE 1394a header + 7.1 HD Audio | Dual LAN with Intel® 82573V/L Gigabit Ethernet controller (w/IOAT support) 2 IEEE 1394a header + 7.1 HD Audio | Dual LAN with Intel® 82573V/L Gigabit Ethernet controller (w/IOAT support) 2 IEEE 1394a header + 7.1 HD Audio | Dual LAN with Intel® 82575 Gigabit Ethernet controller ATI® ES1000 32MB PCI graphics controller |
| Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| 6 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) & 2 x 3.5" spare SATA drive bays & 2 x 5.25" drive bays | 8 x 3.5" hot-swap SAS/SATA drive bays with SES2 & 2 x 5.25" drive bays | 6 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) & 2 x 3.5" spare SATA drive bays & 2 x 5.25" drive bays | 6 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) & 2 x 3.5" spare SATA drive bays & 2 x 5.25" drive bays |
| N/A | N/A | N/A | 1 floppy drive |
| 1200W redundant high-efficiency Gold-level power supply w/PMBus & w/6-pin power for high-end graphics cards | Low-noise 865W high-efficiency power w/6-pin power for high-end graphics cards | Low-noise 865W high-efficiency power w/6-pin power for high-end graphics cards | Low-noise 865W high-efficiency power w/6-pin power for high-end graphics card |
| 5 x 8cm heavy duty fans w/optimal fan speed control & air shroud; 100% cooling redundancy | 2 x 8cm & 1 x 9cm 4-pin PWM fans | 2 x 8cm & 1 x 9cm 4-pin PWM fans | 5 x 8cm heavy duty fans w/optimal fan speed control & air shroud; 100% cooling redundancy |
| 4U Rackmount/Tower 437 x 178 x 648mm (17.2" x 7" x 25.5") | 4U Rackmount/Tower 452 x 178 x 648mm (17.8" x 7" x 25.5") | 4U Rackmount/Tower 452 x 178 x 648mm (17.8" x 7" x 25.5") | 4U Rackmount/Tower 437 x 178 x 648mm (17.2" x 7" x 25.5") |



| MODEL | SuperServer 7045B-8R+/TR+ SuperServer 7045B-8R+B/TR+B | SuperServer 7045B-3/T SuperServer 7045B-3B/TB | SuperWorkstation 7045A-C3B SuperWorkstation 7045A-CTB |
|------------------------------|--|--|---|
| Processor Support | Quad-Core/Dual-Core Intel® Xeon® Processor 5400/5300/5200/5100/5000 series (LGA 771) | Quad-Core/Dual-Core Intel® Xeon® Processor 5400/5300/5200/5100/5000 series (LGA 771) | Quad-Core/Dual-Core Intel® Xeon® Processor 5400/5300/5200/5100 series (LGA 771) |
| Key Applications | Mission-critical applications, enterprise server, large database, e-business, Internet, on-line transaction processing, NAS | Mission-critical applications, enterprise server, large database, e-business, Internet, on-line transaction processing, NAS | High-end workstation, business critical applications, front-end server, database applications, video server |
| Outstanding Features | <ul style="list-style-type: none"> • 100% cooling redundancy • 6 PCI-X & PCI-Express • 64 GB FB-DIMM memory • 2 Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • 800W redundant high-efficiency power | <ul style="list-style-type: none"> • 100% cooling redundancy • 6 SATA drive bays with SGPIO • 6 PCI-X & PCI-Express • 32 GB FBDIMM memory • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • 650W power supply | <ul style="list-style-type: none"> • 8 SAS/SATA drive bays w/SES2 • 6 SATA drive bays w/SGPIO • PCI-Express x16 • 48 GB DDRII 667 SDRAM • 2 Gigabit Ethernet ports • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • Low-noise 865W high-efficiency power |
| Chipset/ Serverboard | Intel® 5000P chipset with 1.33GHz FSB/SUPER● X7DB8+/X7DBE+ | Intel® 5000P chipset with 1.33GHz FSB/SUPER● X7DB3/X7DBE | Intel® 5100 chipset with 1.33GHz FSB/SUPER● X7DCA-3/X7DCA-i |
| System Memory (Max.) | 64 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 16 DIMM sockets | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 48GB Dual-Channel ECC Reg. DDRII 667/533 SDRAM in 6 DIMM sockets |
| Expansion Slots | 2 PCI-E x8 1 PCI-E x4 2 PCI-X 133 MHz 1 PCI-X 100 MHz | 2 PCI-E x8 1 PCI-E x4 2 PCI-X 133 MHz 1 PCI-X 100 MHz | 1 PCI-E x16 1 PCI-E x4 (using x16 slot) 2 64-bit PCI-X 133/100MHz 2 PCI 33 |
| Onboard SATA RAID | Adaptec® 7902W 2-CH U320 (7045B-8+ only) Optional AOC-LPZCR3 (RAID 5) Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Adaptec® 9410W for 8 SAS/SATA (7045B-3 only) Optional AOC-LPZCR3 (RAID 5) Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | LSI® 1068E for SAS/SATA (7045A-C3 only) Optional AOC-iButton68 (RAID 5) RAID 0, 1, 10 Intel® ICH9R for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 |
| Onboard LAN/VGA/Audio | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller ATI® ES1000 16MB PCI graphics controller | Dual LAN with Intel® 82573V/L Gigabit Ethernet controller High definition 7.1 channel sound |
| Manageability | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog |
| Drive Bays | 7045B-8R+: 8 x 3.5" hot-swap U320 SCA drive bays with SAF-TE & 2 x 5.25" drive bays 7045B-TR+: 6 x 3.5" hot-swap SATA drive bays with SGPIO & 2 x 5.25" drive bays | 7045B-3: 8 x 3.5" hot-swap SAS/SATA drive bays with SES2 & 2 x 5.25" drive bays 7045B-T: 6 x 3.5" hot-swap SATA drive bays with SGPIO & 2 x 3.5" spare SATA drive bays & 2 x 5.25" drive bays | 7045A-C3: 8 x 3.5" hot-swap SAS/SATA drive bays with SES2 & 2 x 5.25" drive bays 7045A-CT: 6 x 3.5" hot-swap SATA drive bays with SGPIO & 2 x 3.5" spare SATA drive bays & 2 x 5.25" drive bays |
| Peripheral Bays | 1 floppy drive | 1 floppy drive | 1 floppy drive |
| Power Supply | 800W redundant high-efficiency power supply w/FC | 650W power supply with redundant cooling fan | Low-noise 865W high-efficiency power w/ 6-pin power for high-end graphics card |
| Cooling System | 5 x 8cm heavy duty fans w/optimal fan speed control & air shroud; 100% cooling redundancy | 6 x 8cm hot-swap cooling fans w/ optimal fan speed control & air shroud; 100% cooling redundancy | 2 x 8cm & 1 x 9cm 4-pin Pulse Width Modulated (PWM) fans, 2x active heatsink w/ heatpipe & air shroud |
| Form Factor | 4U Rackmount/Tower 437 x 178 x 648mm (17.2" x 7" x 25.5") | 4U Rackmount/Tower 437 x 178 x 648mm (17.2" x 7" x 25.5") | 4U Rackmount/Tower 437 x 178 x 648mm (17.2" x 7" x 25.5") |

Whisper-Quiet 28dB**SAS RAID 5****Six-Core Xeon MP**

| SuperWorkstation 7045A-WT/WTB | SuperWorkstation 7045A-3/3B | SuperWorkstation 7045A-8/T SuperWorkstation 7045A-8B/TB | SuperServer 8045C-3RB |
|--|--|---|---|
| Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300LV/5200/ 5100LV series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® Processor 5400/5300/5200/5100/5000 sequence | Quad-Core/Dual-Core Intel® Xeon® Processor 5400/5300/5200/5100/5000 sequence | Six-Core/Quad-Core Intel® Xeon® MP Processor 7400/7300/7200 series |
| High-end workstation, business critical applications, front-end server, database applications, video server | High-end workstation, business critical applications, front-end server, database applications, video server | High-end workstation, business critical applications, front-end server, database applications, video server | High-end enterprise server, SQL server, high performance computing cluster (HPCC), high density server farm |
| <ul style="list-style-type: none"> • 6 SATA drive bays w/SGPIO • 6 PCI-X & PCI-Express (Gen. 2.0) • 64 GB FB-DIMM memory • 2 Gigabit Ethernet ports • Universal I/O (UIO) support • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • Low-noise 865W high-efficiency power | <ul style="list-style-type: none"> • 8 SAS/SATA drive bays w/SES2 • 6 PCI-X & PCI-Express • 32 GB FB-DIMM memory • 2 Gigabit Ethernet ports • ZCR support • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • Low-noise 645W w/fan speed control | <ul style="list-style-type: none"> • 8 SCA drive bays • 6 SATA drive bays w/SGPIO • 6 PCI-X & PCI-Express • 32 GB FB-DIMM memory • 2 Gigabit Ethernet ports • ZCR support • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • Low-noise 645W w/fan speed control | <ul style="list-style-type: none"> • 24 processing cores • 5 SAS drive bays • PCI-Express & PCI-X • 192 GB FB-DIMM 667/533 SDRAM • 2 Gigabit Ethernet ports • IPMI 2.0 server management • 1200W high-efficiency redundant power |
| Intel® 5400 chipset with 1.6GHz FSB/ SUPER● X7DWA-N | Intel® 5000X chipset with 1.33GHz FSB/ SUPER● X7DA3 | Intel® 5000X chipset with 1.33GHz FSB/ SUPER● X7DA8/X7DAE | Intel® 7300 chipset with 1.06GHz FSB/ SUPER● X7QC3 |
| 64GB Fully-Buffered DIMM (FBD) DDRII 800/667 in 8 DIMM sockets 1.5V & 1.8V FB-DIMM support | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 192 GB Fully-buffered DIMM (FBD) DDRII 667/533 in 24 DIMM sockets |
| 2 PCI-E x16 Gen. 2.0 2 PCI-X 133 MHz 2 PCI 33 MHz Universal I/O slot | 1 PCI-E x16 1 PCI-E x4 (in x16 slot) 2 PCI-X 133 MHz 1 PCI-X 100 MHz 1 PCI 33 MHz | 1 PCI-E x16 1 PCI-E x4 (in x16 slot) 2 PCI-X 133 MHz 1 PCI-X 100 MHz 1 PCI 33 MHz | 1 PCI-E x8 (using x16 slot) 1 PCI-E x8 1 PCI-E x4 (using x8 slot) 1 PCI-X 133MHz |
| Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 | Adaptec® 9410 for 8 SAS/SATA ports Optional AOC-LPZCR3 (RAID 5) Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Adaptec® 7902W 2-ch U320 (7045A-8 only) Optional AOC-LPZCR3 (RAID 5) Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | LSI® 1068e 2-CH 8-port SAS controller Optional AOC-iButton68 (RAID 5) Intel® ESB2 for 6 SATA; RAID 0, 1, 5, 10 |
| Dual LAN with Intel® 82575 Gigabit Ethernet controller ATI® ES1000 32MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller AC'97 audio CODEC high quality 6-channel sound | Dual LAN with Intel® 82563EB Gigabit Ethernet controller AC'97 audio CODEC high quality 6-channel sound | Dual LAN with Intel® 82575EB Gigabit Ethernet controller ATI® ES1000 32MB PCI graphics controller |
| SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor®, Watch Dog |
| 6 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) & 2 x 3.5" spare SATA drive bays 2 x 5.25" drive bays | 8 x 3.5" hot-swap SAS/SATA drive bays with SES2 & 2 x 5.25" drive bays | 7045A-8: 8 x 3.5" hot-swap U320 SCSI SCA drive bays w/SAF-TE & 2 x 5.25" 7045A-T: 6 x 3.5" hot-swap SATA drive bays with SGPIO & 2 x 3.5" spare SATA drive bays & 2 x 5.25" drive bays | 5 x 3.5" hot-swap SAS drive bays with SES2 |
| 1 floppy drive | 1 floppy drive | 1 floppy drive | 90-degree rotatable module: 2 USB 2.0 ports & 2 x 5.25" drive bays, 1 floppy drive & 6 LED indicators |
| Low-noise 865W high-efficiency power w/ 6-pin power for high-end graphics card | 645W w/low-noise fan speed control | 645W w/low-noise fan speed control | 1200W redundant high-efficiency power supply w/PC |
| 4 x 8cm & 1 x 9cm 4-pin Pulse Width Modulated (PWM) fans & air shroud | 4 x 8cm & 1 x 9cm 4-pin Pulse Width Modulated (PWM) fans & air shroud | 4 x 8cm & 1 x 9cm 4-pin Pulse Width Modulated (PWM) fans & air shroud | 3 x 8cm hot-swap cooling fans & 3 x 8cm exhaust fans with optimal fan speed control & air shroud |
| 4U Rackmount/Tower 437 x 178 x 648mm (17.2" x 7" x 25.5") | 4U Rackmount/Tower 437 x 178 x 648mm (17.2" x 7" x 25.5") | 4U Rackmount/Tower 437 x 178 x 648mm (17.2" x 7" x 25.5") | 4U Rackmount/Tower 452 x 178 x 746mm (17.8" x 7" x 29.4") |

Whisper-Quiet 28dB

Six-Core Xeon MP



| SuperWorkstation 7045A-WT/WTB | SuperWorkstation 7045A-3/3B | SuperWorkstation 7045A-8/T SuperWorkstation 7045A-8B/TB | SuperServer 8045C-3RB |
|--|--|---|--|
| Quad-Core/Dual-Core Intel® Xeon® processor 5400/5300LV/5200/ 5100LV series (LGA771) | Quad-Core/Dual-Core Intel® Xeon® Processor 5400/5300/5200/5100/5000 sequence | Quad-Core/Dual-Core Intel® Xeon® Processor 5400/5300/5200/5100/5000 sequence | Six-Core/Quad-Core Intel® Xeon® MP Processor 7400/7300/7200 series |
| High-end workstation, business critical applications, front-end server, database applications, video server | High-end workstation, business critical applications, front-end server, database applications, video server | High-end workstation, business critical applications, front-end server, database applications, video server | High-end enterprise server, SQL server, high performance computing cluster (HPCC), high density server farm |
| <ul style="list-style-type: none"> • 6 SATA drive bays w/SGPIO • 6 PCI-X & PCI-Express (Gen. 2.0) • 64 GB FB-DIMM memory • 2 Gigabit Ethernet ports • Universal I/O (UIO) support • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • Low-noise 865W high-efficiency power | <ul style="list-style-type: none"> • 8 SAS/SATA drive bays w/SES2 • 6 PCI-X & PCI-Express • 32 GB FB-DIMM memory • 2 Gigabit Ethernet ports • ZCR support • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • Low-noise 645W w/fan speed control | <ul style="list-style-type: none"> • 8 SCA drive bays • 6 SATA drive bays w/SGPIO • 6 PCI-X & PCI-Express • 32 GB FB-DIMM memory • 2 Gigabit Ethernet ports • ZCR support • IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN • Low-noise 645W w/fan speed control | <ul style="list-style-type: none"> • 24 processing cores • 5 SAS drive bays • PCI-Express & PCI-X expansions • 192 GB FB-DIMM 667/533 SDRAM • 2 Gigabit Ethernet ports • IPMI 2.0 server management • 1200W high-efficiency redundant power |
| Intel® 5400 chipset with 1.6GHz FSB/ SUPER●® X7DWA-N | Intel® 5000X chipset with 1.33GHz FSB/ SUPER●® X7DA3 | Intel® 5000X chipset with 1.33GHz FSB/ SUPER●® X7DA8/X7DAE | Intel® 7300 chipset with 1.06GHz FSB/ SUPER●® X7QC3 |
| 64GB Fully-Buffered DIMM (FBD) DDRII 800/667 in 8 DIMM sockets 1.5V & 1.8V FB-DIMM support | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 32 GB Fully-Buffered DIMM (FBD) DDRII 667/533 in 8 DIMM sockets | 192 GB Fully-buffered DIMM (FBD) DDRII 667/533 in 24 DIMM sockets |
| 2 PCI-E x16 Gen. 2.0 2 PCI-X 133 MHz 2 PCI 33 MHz Universal I/O slot | 1 PCI-E x16 1 PCI-E x4 (in x16 slot) 2 PCI-X 133 MHz 1 PCI-X 100 MHz 1 PCI 33 MHz | 1 PCI-E x16 1 PCI-E x4 (in x16 slot) 2 PCI-X 133 MHz 1 PCI-X 100 MHz 1 PCI 33 MHz | 1 PCI-E x8 (using x16 slot) 1 PCI-E x8 1 PCI-E x4 (using x8 slot) 1 PCI-X 133MHz |
| Intel® ESB2 for 6 SATA (3 Gbps) RAID 0, 1, 5, 10 | Adaptec® 9410 for 8 SAS/SATA ports Optional AOC-LPZCR3 (RAID 5) Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | Adaptec® 7902W 2-ch U320 (7045A-8 only) Optional AOC-LPZCR3 (RAID 5) Intel® ESB2 for 6 SATA (3 Gbps); RAID 0, 1, 5, 10 | LSI® 1068e 2-CH 8-port SAS controller Optional AOC-iButton68 (RAID 5) Intel® ESB2 for 6 SATA; RAID 0, 1, 5, 10 |
| Dual LAN with Intel® 82575 Gigabit Ethernet controller ATI® ES1000 32MB PCI graphics controller | Dual LAN with Intel® 82563EB Gigabit Ethernet controller AC'97 audio CODEC high quality 6-channel sound | Dual LAN with Intel® 82563EB Gigabit Ethernet controller AC'97 audio CODEC high quality 6-channel sound | Dual LAN with Intel® 82575EB Gigabit Ethernet controller ATI® ES1000 32MB PCI graphics controller |
| SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMLP slot (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor® III, Watch Dog | SIMSO socket (IPMI 2.0 with virtual media over LAN & optional KVM-over-LAN) Super Doctor®, Watch Dog |
| 6 x 3.5" hot-swap SATA drive bays with enclosure management (SGPIO) & 2 x 3.5" spare SATA drive bays 2 x 5.25" drive bays | 8 x 3.5" hot-swap SAS/SATA drive bays with SES2 & 2 x 5.25" drive bays | 7045A-8: 8 x 3.5" hot-swap U320 SCSI SCA drive bays w/SAF-TE & 2 x 5.25" 7045A-T: 6 x 3.5" hot-swap SATA drive bays with SGPIO & 2 x 3.5" spare SATA drive bays & 2 x 5.25" drive bays | 5 x 3.5" hot-swap SAS drive bays with SES2 |
| 1 floppy drive | 1 floppy drive | 1 floppy drive | 90-degree rotatable module: 2 USB 2.0 ports & 2 x 5.25" drive bays, 1 floppy drive & 6 LED indicators |
| Low-noise 865W high-efficiency power w/ 6-pin power for high-end graphics card | 645W w/low-noise fan speed control | 645W w/low-noise fan speed control | 1200W redundant high-efficiency power supply w/TC |
| 4 x 8cm & 1 x 9cm 4-pin Pulse Width Modulated (PWM) fans & air shroud | 4 x 8cm & 1 x 9cm 4-pin Pulse Width Modulated (PWM) fans & air shroud | 4 x 8cm & 1 x 9cm 4-pin Pulse Width Modulated (PWM) fans & air shroud | 3 x 8cm hot-swap cooling fans & 3 x 8cm exhaust fans with optimal fan speed control & air shroud |
| 4U Rackmount/Tower 437 x 178 x 648mm (17.2" x 7" x 25.5") | 4U Rackmount/Tower 437 x 178 x 648mm (17.2" x 7" x 25.5") | 4U Rackmount/Tower 437 x 178 x 648mm (17.2" x 7" x 25.5") | 4U Rackmount/Tower 452 x 178 x 746mm (17.8" x 7" x 29.4") |

SUPERMICRO[®]

We Keep IT Green[™]



**3 Add-on Cards in 1U
UIO (Universal I/O)**



**Personal
Supercomputer**



Datacenter Blade[™]



**2U Twin²[™]
4 DP Nodes in 2U
375 GFLOPS/kW**

Headquarters:

Super Micro Computer, Inc.
980 Rock Ave.
San Jose, CA 95131, USA
Tel: +1-408-503-8000
Fax: +1-408-503-8008
E-mail: marketing@supermicro.com

European Branch:

Super Micro Computer, B.V.
Het Sterrenbeeld 28, 5215 ML,
's-Hertogenbosch, The Netherlands
Tel: +31-73-640-0390
Fax: +31-73-641-6525
E-mail: sales@supermicro.nl

Asian Branch:

Super Micro Computer, B.V.
4F, No 232-1, Liancheng Rd., Chung-Ho
235, Taipei County, Taiwan R.O.C.
Tel: +886-2-8226-3990
Fax: +886-2-8226-3991
E-mail: sales@supermicro.nl

www.supermicro.com