


Installing the DIGITAL MultiSwitch Hub 624T Carrier Card (DLXMC)

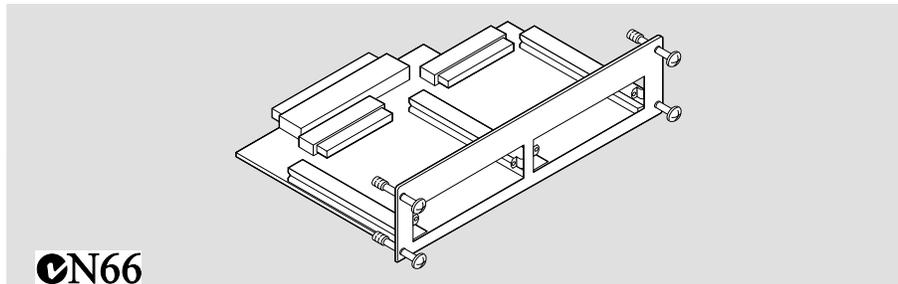

NPB-0563-96F

Introduction


The DIGITAL MultiSwitch Hub 624T Carrier Card inserts into the expansion slot in the front of the DIGITAL MultiSwitch Hub 624T. The Carrier Card provides the module with two slots for holding 10 Mb/s Ethernet modular media interfaces (MM-10s). The DIGITAL MultiSwitch Hub 624T uses the following types of MM-10 cards, which provide connectivity between the module and other network devices: 10Base2, 10BaseT, 10BaseFL, AUI, and Reverse AUI. The carrier card operates only in the DIGITAL MultiSwitch Hub 624T.

Note: Only the right-side slot of the Carrier Card provides power to an AUI MM-10. If you intend to connect the module to a nonpowered device, connect it to an AUI MM-10 installed in the right-hand slot of the carrier card.

Installation Procedure


Before you install the DIGITAL MultiSwitch Hub 624T Carrier Card, make sure that the module *has no power connected to it*. The Carrier Card *is not hot-swappable*. To install the Carrier Card, complete the following steps. A Phillips-head screwdriver is required.

- 1 Make sure that power to the DIGITAL MultiSwitch Hub 624T is off by removing the module from its DIGITAL MultiSwitch 600 System or DEChub 900 MultiSwitch.
- 2 Loosen the four screws and remove the cover from the DIGITAL MultiSwitch Hub 624T expansion slot.

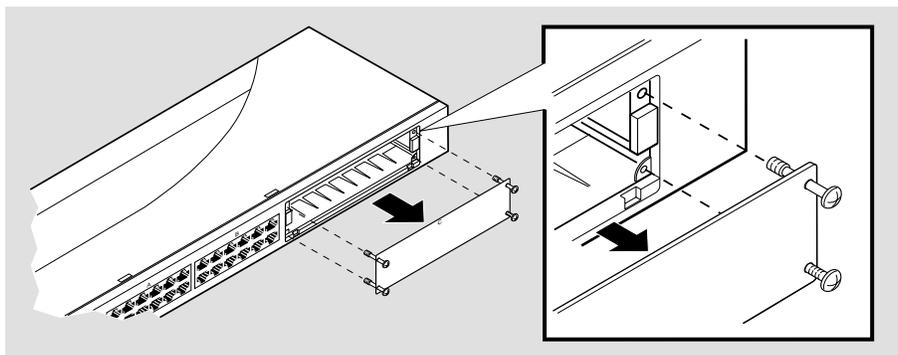

NPB-0523-96F

- 3 Hold the DIGITAL MultiSwitch Hub 624T Carrier Card by its bezel and align the edges of the Carrier Card (1) with the card guides (2) in the module's expansion slot.

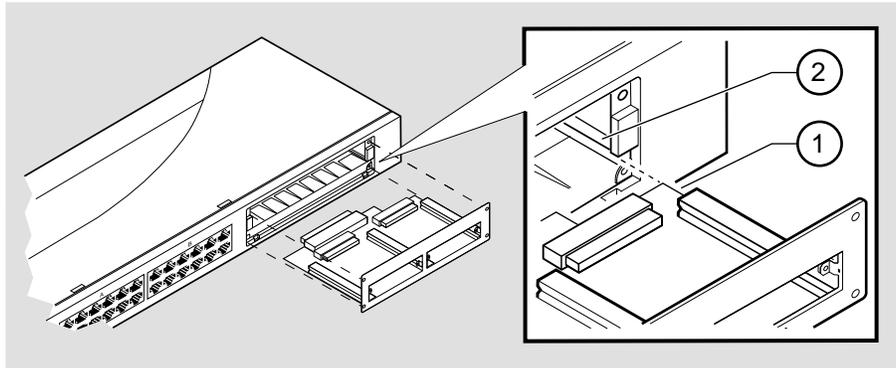

NPB-0550-96F

- 4 Push the Carrier Card into the slot until it is firmly seated inside the module.
- 5 Align and securely fasten the four screws.
- 6 Power up the DIGITAL MultiSwitch Hub 624T by reseating the module in the DIGITAL MultiSwitch 600 system or DEChub 900 MultiSwitch. The following LED states occur:
 - a The Power OK LED  lights.
 - b The DIGITAL MultiSwitch Hub 624T completes self-test and the Module OK LED  lights.
 - c The Port Group Select LEDs flash repeatedly from A to B.

Reference

If the LEDs do not light as described, refer to the troubleshooting information in the *DIGITAL MultiSwitch Hub 624T Installation and Configuration* manual. The manual provides safety and product specification information. The information is also available on the Digital Equipment Corporation Network Products Engineering Home Page on the World Wide Web at the following addresses:

North America: <http://www.networks.digital.com>
Europe: <http://www.networks.europe.digital.com>
Australia: <http://www.digital.com.au/networks>